

## HB

cable clamp for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel. For fastening to C-profile rails (C) with a slot size of 11 mm.

Zinc coated

| Product | D        | H <sub>max</sub> | M    | number of cables | G           |
|---------|----------|------------------|------|------------------|-------------|
| 12 HB   | 8-12 mm  | 41 mm            | 2 Nm | 1                | 2,5 kg/100  |
| 16 HB   | 12-16 mm | 46 mm            | 2 Nm | 1                | 2,8 kg/100  |
| 20 HB   | 16-20 mm | 50 mm            | 2 Nm | 1                | 3,2 kg/100  |
| 24 HB   | 20-24 mm | 54 mm            | 2 Nm | 1                | 3,8 kg/100  |
| 28 HB   | 24-28 mm | 58 mm            | 2 Nm | 1                | 4,1 kg/100  |
| 32 HB   | 28-32 mm | 63 mm            | 2 Nm | 1                | 5,8 kg/100  |
| 36 HB   | 32-36 mm | 67 mm            | 2 Nm | 1                | 6,7 kg/100  |
| 40 HB   | 36-40 mm | 71 mm            | 2 Nm | 1                | 7,4 kg/100  |
| 44 HB   | 40-44 mm | 81 mm            | 4 Nm | 1                | 9,3 kg/100  |
| 48 HB   | 44-48 mm | 85 mm            | 4 Nm | 1                | 9,8 kg/100  |
| 52 HB   | 48-52 mm | 90 mm            | 4 Nm | 1                | 10,4 kg/100 |
| 56 HB   | 52-56 mm | 94 mm            | 4 Nm | 1                | 11,1 kg/100 |
| 60 HB   | 56-60 mm | 98 mm            | 4 Nm | 1                | 14,7 kg/100 |
| 64 HB   | 60-64 mm | 102 mm           | 4 Nm | 1                | 15,4 kg/100 |
| 70 HB   | 64-70 mm | 109 mm           | 4 Nm | 1                | 17,1 kg/100 |
| 12/2 HB | 8-12 mm  | 58 mm            | 2 Nm | 2                | 3,2 kg/100  |
| 16/2 HB | 12-16 mm | 67 mm            | 2 Nm | 2                | 3,9 kg/100  |
| 20/2 HB | 16-20 mm | 75 mm            | 2 Nm | 2                | 4,4 kg/100  |
| 24/2 HB | 20-24 mm | 84 mm            | 2 Nm | 2                | 5,1 kg/100  |
| 28/2 HB | 24-28 mm | 92 mm            | 2 Nm | 2                | 5,7 kg/100  |
| 32/2 HB | 28-32 mm | 101 mm           | 2 Nm | 2                | 8,7 kg/100  |

Page 1



| Product | D        | H <sub>max</sub> | M    | number of cables | G           |
|---------|----------|------------------|------|------------------|-------------|
| 36/2 HB | 32-36 mm | 109 mm           | 2 Nm | 2                | 9,8 kg/100  |
| 40/2 HB | 36-40 mm | 117 mm           | 2 Nm | 2                | 10,5 kg/100 |
| 44/2 HB | 40-44 mm | 127 mm           | 4 Nm | 2                | 12,9 kg/100 |
| 48/2 HB | 44-48 mm | 135 mm           | 4 Nm | 2                | 13,5 kg/100 |
| 52/2 HB | 48-52 mm | 144 mm           | 4 Nm | 2                | 13,7 kg/100 |
| 56/2 HB | 52-56 mm | 152 mm           | 4 Nm | 2                | 16,1 kg/100 |

## Aluminium

| Product  | D        | H <sub>max</sub> | M      | number of cables | G           |
|----------|----------|------------------|--------|------------------|-------------|
| 12 HB-AL | 8-12 mm  | 41 mm            | 1,5 Nm | 1                | 1,7 kg/100  |
| 16 HB-AL | 12-16 mm | 46 mm            | 1,5 Nm | 1                | 1,9 kg/100  |
| 20 HB-AL | 16-20 mm | 50 mm            | 1,5 Nm | 1                | 2,5 kg/100  |
| 24 HB-AL | 20-24 mm | 54 mm            | 1,5 Nm | 1                | 2,9 kg/100  |
| 28 HB-AL | 24-28 mm | 58 mm            | 1,5 Nm | 1                | 3,2 kg/100  |
| 32 HB-AL | 28-32 mm | 63 mm            | 1,5 Nm | 1                | 4,2 kg/100  |
| 36 HB-AL | 32-36 mm | 67 mm            | 1,5 Nm | 1                | 4,5 kg/100  |
| 40 HB-AL | 36-40 mm | 71 mm            | 1,5 Nm | 1                | 4,8 kg/100  |
| 44 HB-AL | 40-44 mm | 81 mm            | 3,0 Nm | 1                | 6,4 kg/100  |
| 48 HB-AL | 44-48 mm | 85 mm            | 3,0 Nm | 1                | 7 kg/100    |
| 52 HB-AL | 48-52 mm | 90 mm            | 3,0 Nm | 1                | 9,8 kg/100  |
| 56 HB-AL | 52-56 mm | 94 mm            | 3,0 Nm | 1                | 10,4 kg/100 |

**D:** diameter

**H<sub>max</sub>:** Maximum height


**M:** torque

**number of cables:** Maximum number of installable cables

**G:** weight

## DETAILS / APPLICATIONS



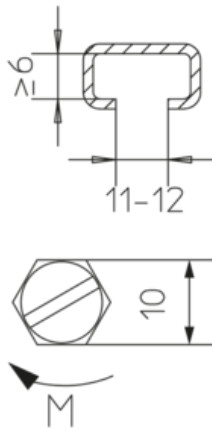

## OPTIONAL ACCESSORIES

B 3, B 6

