

## HB-IW

cable clamp with additional insulating vat for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel and additional insulating vat made of polystyrene. For fastening to C-profile rails (C) with a slot size of 11 mm.

Zinc coated

Product	D	H <sub>max</sub>	M	number of cables	G
12 HB-IW	8-12 mm	42,5 mm	2 Nm	1	2,7 kg/100
16 HB-IW	12-16 mm	47,5 mm	2 Nm	1	3 kg/100
20 HB-IW	16-20 mm	51,5 mm	2 Nm	1	3,4 kg/100
24 HB-IW	20-24 mm	55,7 mm	2 Nm	1	4 kg/100
28 HB-IW	24-28 mm	59,7 mm	2 Nm	1	4,5 kg/100
32 HB-IW	28-32 mm	65 mm	2 Nm	1	6,2 kg/100
36 HB-IW	32-36 mm	69 mm	2 Nm	1	7,1 kg/100
40 HB-IW	36-40 mm	73 mm	2 Nm	1	7,9 kg/100
44 HB-IW	40-44 mm	83 mm	4 Nm	1	9,9 kg/100
48 HB-IW	44-48 mm	87 mm	4 Nm	1	10,1 kg/100
52 HB-IW	48-52 mm	92,5 mm	4 Nm	1	11,1 kg/100
56 HB-IW	52-56 mm	96,5 mm	4 Nm	1	11,7 kg/100
60 HB-IW	56-60 mm	100,5 mm	4 Nm	1	15,4 kg/100
64 HB-IW	60-64 mm	104,5 mm	4 Nm	1	16,1 kg/100
70 HB-IW	64-70 mm	111,5 mm	4 Nm	1	17,8 kg/100

**D:** diameter

**H<sub>max</sub>:** Maximum height


**M:** torque

**number of cables:** Maximum number of installable cables

**G:** weight



## DETAILS / APPLICATIONS

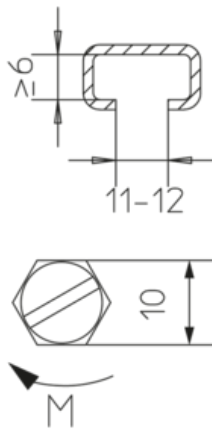

## OPTIONAL ACCESSORIES

B 3, B 6

