

## KDAG 41

ceiling fixed bracket, 41x41 mm

ceiling bracket support made of profile rail 41x41 mm with welded head plate

$F_D/P$ : coefficient for calculation of the dowel load  $F_D$  with effective bracket load  $P$  respectively the sum of effective bracket loads.



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	L	G
KDAG 41-02F	200 mm	1,1 kg
KDAG 41-03F	300 mm	1,4 kg
KDAG 41-04F	400 mm	1,7 kg
KDAG 41-05F	500 mm	1,9 kg
KDAG 41-06F	600 mm	2,2 kg
KDAG 41-07F	700 mm	2,5 kg
KDAG 41-08F	800 mm	2,7 kg
KDAG 41-09F	900 mm	3 kg
KDAG 41-10F	1000 mm	3,2 kg

**L:** length  
**G:** weight

## DETAILS / APPLICATIONS



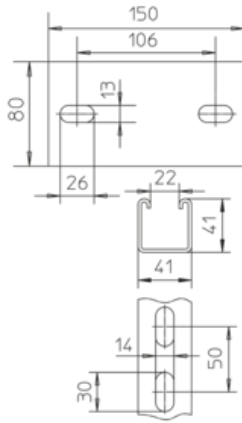

$M_{max} = 700 \text{ Nm}$   
 $F_{zug} = 16 \text{ kN}$

B	L <sub>k</sub>	P <sub>max</sub>	$\frac{F_D}{P}$
mm	mm	kN	
100	125	4,2	1,4
200	225	2,7	1,9
300	325	2,0	2,3
400	425	1,6	2,8
500	525	1,4	3,3
600	625	1,2	3,8

## OPTIONAL ACCESSORIES

KA 30, KA 41, SD, AM22, AMF22, SA 2

