


## KDIA-G

adapter for KDI, welded

The KDIA-G is an adapter for the KDI support to reduce the loads on the dowels or to be able to distribute the load between 4 dowels in accordance with the approval.

KDI is placed in KDIA-G. With the KDIA-G, the KDI is fixed directly to the concrete.

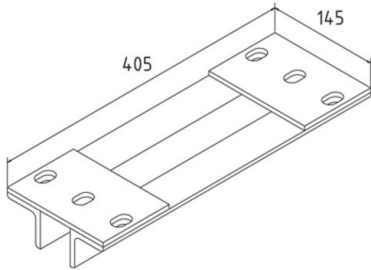


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	L	G
KDIA-G F	56 mm	145 mm	405 mm	6,26 kg


**H:** height  
**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

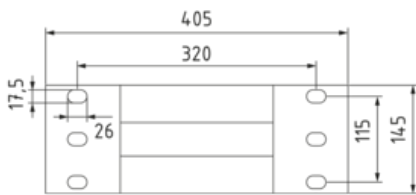

B mm	L <sub>k</sub> mm	F <sub>d</sub> /P
100	120	0,4
200	220	0,5
300	320	0,6
400	420	0,7
500	520	0,7
600	620	0,8

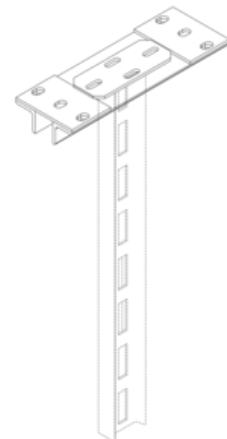

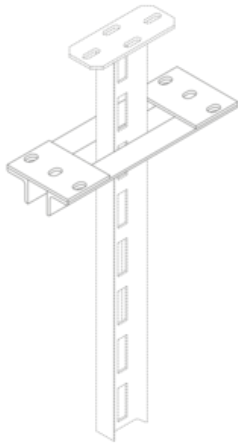

## OPTIONAL ACCESSORIES

KDI

