


KHA 21

profile rail 41x21 mm, perforated

profile rail 41x21x2.50 mm, with continuous perforation 14x30, slot size 22 mm

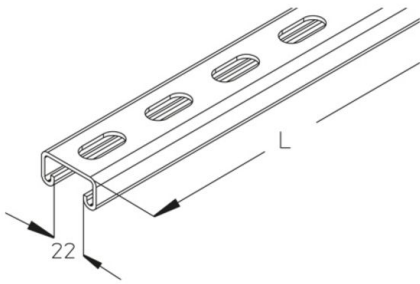

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHA 21-30F	21 mm	41 mm	3000 mm	2,50 mm	5,32 kg
KHA 21-60F	21 mm	41 mm	6000 mm	2,50 mm	10,64 kg



Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
KHA 21-30E4	21 mm	41 mm	3000 mm	2,50 mm	4,97 kg
KHA 21-60E4	21 mm	41 mm	6000 mm	2,50 mm	9,94 kg

- H:** height
- B:** width
- L:** length
- t:** material thickness
- G:** weight

DETAILS / APPLICATIONS



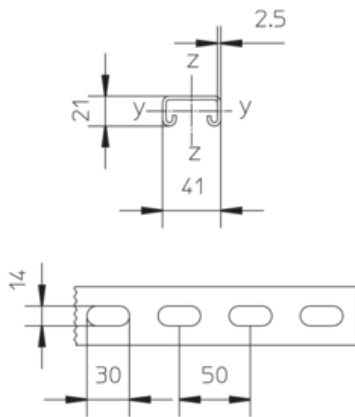

$$\begin{aligned}W_y &= 0.92 \text{ cm}^3 \\W_z &= 2.56 \text{ cm}^3 \\I_y &= 1.02 \text{ cm}^4 \\I_z &= 5.25 \text{ cm}^4\end{aligned}$$

OPTIONAL ACCESSORIES

AM22, RUS 41, SA 1, SAI 21

