


# KHA 8

profile rail 40x22 mm, perforated

profile rail 40x22x2.00 mm, with continuous perforation 11x30, slot size 18 mm

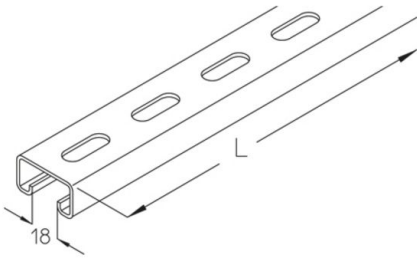

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

| Product    | H     | B     | L       | t       | G       |
|------------|-------|-------|---------|---------|---------|
| KHA 8-03GV | 22 mm | 40 mm | 300 mm  | 2,00 mm | 0,43 kg |
| KHA 8-06GV | 22 mm | 40 mm | 600 mm  | 2,00 mm | 0,87 kg |
| KHA 8-30GV | 22 mm | 40 mm | 3000 mm | 2,00 mm | 4,33 kg |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product   | H     | B     | L       | t       | G       |
|-----------|-------|-------|---------|---------|---------|
| KHA 8-01F | 22 mm | 40 mm | 100 mm  | 2,00 mm | 0,14 kg |
| KHA 8-02F | 22 mm | 40 mm | 200 mm  | 2,00 mm | 0,30 kg |
| KHA 8-03F | 22 mm | 40 mm | 300 mm  | 2,00 mm | 0,46 kg |
| KHA 8-04F | 22 mm | 40 mm | 400 mm  | 2,00 mm | 0,60 kg |
| KHA 8-05F | 22 mm | 40 mm | 500 mm  | 2,00 mm | 0,76 kg |
| KHA 8-06F | 22 mm | 40 mm | 600 mm  | 2,00 mm | 0,90 kg |
| KHA 8-07F | 22 mm | 40 mm | 700 mm  | 2,00 mm | 1,06 kg |
| KHA 8-08F | 22 mm | 40 mm | 800 mm  | 2,00 mm | 1,20 kg |
| KHA 8-09F | 22 mm | 40 mm | 900 mm  | 2,00 mm | 1,31 kg |
| KHA 8-10F | 22 mm | 40 mm | 1000 mm | 2,00 mm | 1,53 kg |
| KHA 8-11F | 22 mm | 40 mm | 1100 mm | 2,00 mm | 1,69 kg |
| KHA 8-12F | 22 mm | 40 mm | 1200 mm | 2,00 mm | 1,85 kg |
| KHA 8-13F | 22 mm | 40 mm | 1300 mm | 2,00 mm | 1,94 kg |

Page.1



| Product   | H     | B     | L       | t       | G       |
|-----------|-------|-------|---------|---------|---------|
| KHA 8-14F | 22 mm | 40 mm | 1400 mm | 2,00 mm | 2,13 kg |
| KHA 8-15F | 22 mm | 40 mm | 1500 mm | 2,00 mm | 2,31 kg |
| KHA 8-20F | 22 mm | 40 mm | 2000 mm | 2,00 mm | 3,10 kg |
| KHA 8-30F | 22 mm | 40 mm | 3000 mm | 2,00 mm | 4,40 kg |
| KHA 8-60F | 22 mm | 40 mm | 6000 mm | 2,00 mm | 8,80 kg |



## Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

| Product    | H     | B     | L       | t       | G       |
|------------|-------|-------|---------|---------|---------|
| KHA 8-02E4 | 22 mm | 40 mm | 200 mm  | 2,00 mm | 0,30 kg |
| KHA 8-03E4 | 22 mm | 40 mm | 300 mm  | 2,00 mm | 0,45 kg |
| KHA 8-04E4 | 22 mm | 40 mm | 400 mm  | 2,00 mm | 0,60 kg |
| KHA 8-05E4 | 22 mm | 40 mm | 500 mm  | 2,00 mm | 0,75 kg |
| KHA 8-06E4 | 22 mm | 40 mm | 600 mm  | 2,00 mm | 0,90 kg |
| KHA 8-07E4 | 22 mm | 40 mm | 700 mm  | 2,00 mm | 1,05 kg |
| KHA 8-08E4 | 22 mm | 40 mm | 800 mm  | 2,00 mm | 1,20 kg |
| KHA 8-09E4 | 22 mm | 40 mm | 900 mm  | 2,00 mm | 1,34 kg |
| KHA 8-10E4 | 22 mm | 40 mm | 1000 mm | 2,00 mm | 1,50 kg |
| KHA 8-11E4 | 22 mm | 40 mm | 1100 mm | 2,00 mm | 1,64 kg |
| KHA 8-12E4 | 22 mm | 40 mm | 1200 mm | 2,00 mm | 1,79 kg |


**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



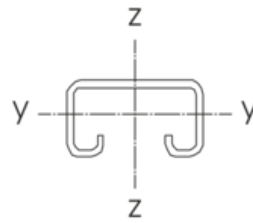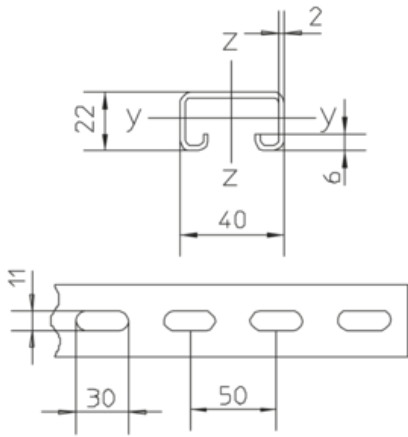

$$\begin{aligned}
 W_y &= 1.05 \text{ cm}^3 \\
 W_z &= 2.24 \text{ cm}^3 \\
 I_y &= 1.18 \text{ cm}^4 \\
 I_z &= 4.48 \text{ cm}^4
 \end{aligned}$$

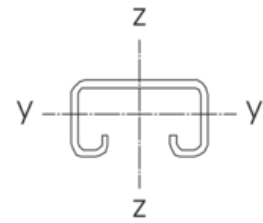

$$\begin{aligned}
 W_y &= 1.05 \text{ cm}^3 \\
 W_z &= 2.24 \text{ cm}^3 \\
 I_y &= 1.18 \text{ cm}^4 \\
 I_z &= 4.48 \text{ cm}^4
 \end{aligned}$$

## OPTIONAL ACCESSORIES

SA 1, SAI 21, HS18, AM18, AMF18, ASK 8

