


KHUSS 60

support piece, KHU 60 Maintenance of function - Standard support structures

The products can be used in conjunction with wall brackets. For technical parameters, see National Technical Test Certificates (abPs).

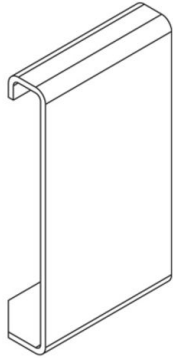

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	G
KHUSS 60S	0,18 kg
incl.:	
1x SES 10X100	hexagon head bolt, DIN 933
1x SEM 10	hexagon-nut, DIN 934
2x US 10X21	washer, DIN EN ISO 7089

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	G
KHUSS 60F	0,19 kg
incl.:	
1x SES 10X100F	hexagon head bolt, DIN 933
1x SEM 10F	hexagon-nut, DIN 934
2x US 10X21F	washer, DIN EN ISO 7089

G: weight

