


KHUV 57

connector, KHU 57

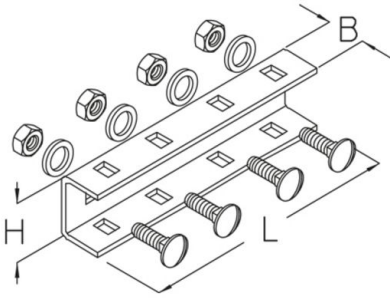

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	H	B	L	t	G
KHUV 57GV	63 mm	32,5 mm	210 mm	2,50 mm	0,59 kg
incl.:					
4x FRSV 10X20	round-head screw with short square, DIN 603				
4x SEMS 10	hexagon-nut with flange, DIN EN 1661				

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
KHUV 57S	63 mm	32,5 mm	210 mm	2,50 mm	0,60 kg
incl.:					
4x FRSV 10X20	round-head screw with short square, DIN 603				
4x SEM 10	hexagon-nut, DIN 934				

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHUV 57F	63 mm	32,5 mm	210 mm	2,50 mm	0,63 kg
incl.:					
4x FRSV 10X20F	round-head screw with short square, DIN 603				
4x SEM 10F	hexagon-nut, DIN 934				



Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
KHUV 57E	63 mm	32,5 mm	210 mm	2,50 mm	0,60 kg
incl.:					
4x FRSV 10X20E	round-head screw with short square, DIN 603				
4x SEM 10E	hexagon-nut, DIN 934				

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
KHUV 57E4	63 mm	32,5 mm	210 mm	2,50 mm	0,61 kg
incl.:					
4x FRSV 10X20E4	round-head screw with short square, DIN 603				
4x SEM 10E4	hexagon-nut, DIN 934				

H: height
B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS

