


KTW-R 4-12/2-10

cable support trough, Ø 40-120 mm

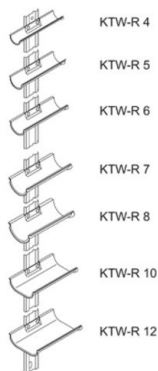

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	D
KTW-R 4/2-10	56 mm	40 mm
KTW-R 5/2-10	66 mm	50 mm
KTW-R 6/2-10	76 mm	60 mm
KTW-R 7/2-10	86 mm	70 mm
KTW-R 8/2-10	97 mm	80 mm
KTW-R 12/2-10	138 mm	120 mm

B: width
D: diameter

DETAILS / APPLICATIONS



