


## LGA 60

cable ladder branch, height = 60 mm

cable ladder branch, formed component as T-piece

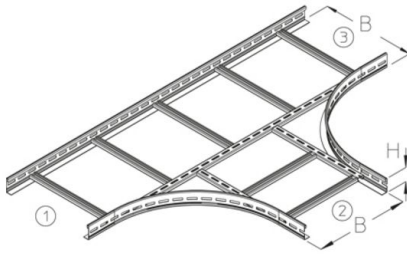

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
LGA 60-20F	60 mm	200 mm	400 mm	4,69 kg
LGA 60-30F	60 mm	300 mm	400 mm	5,39 kg
LGA 60-40F	60 mm	400 mm	400 mm	6,1 kg
LGA 60-50F	60 mm	500 mm	400 mm	6,8 kg
LGA 60-60F	60 mm	600 mm	400 mm	7,51 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	R	G
LGA 60-20E	60 mm	200 mm	400 mm	4,41 kg
LGA 60-30E	60 mm	300 mm	400 mm	5,07 kg
LGA 60-40E	60 mm	400 mm	400 mm	5,74 kg
LGA 60-50E	60 mm	500 mm	400 mm	6,4 kg
LGA 60-60E	60 mm	600 mm	400 mm	7,06 kg

H: height


B: width

R: radius

G: weight



## DETAILS / APPLICATIONS

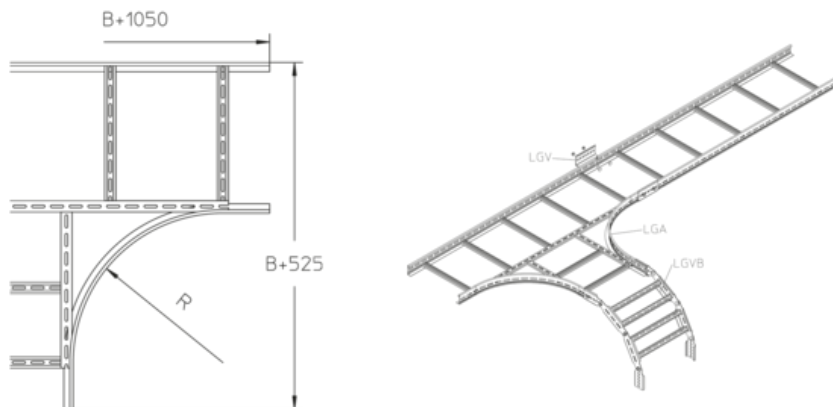

## OPTIONAL ACCESSORIES

LGV 60, LGVH 60, LGVV 60, KLU, LAD, LADR, LGTRV 60



UL classified

