

## LGG 60

vertical cable ladder, L-profile Maintenance of function - Standard support structures

cable ladder, light duty with continuously perforated side beams, rungs made of profile rail 30x15 mm, certified including electrical conductivity according to DIN EN 61537, max. cable load 20 kg/m, mounting distance max. 1.0 m and max. width 400 mm.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	P <sub>max</sub>	G
LGG 60-30-3S	60 mm	300 mm	3000 mm	1,5 kN	8,61 kg
LGG 60-40-3S	60 mm	400 mm	3000 mm	1,5 kN	9,3 kg
LGG 60-20S	60 mm	200 mm	6000 mm	1,5 kN	15,84 kg
LGG 60-30S	60 mm	300 mm	6000 mm	1,5 kN	17,22 kg
LGG 60-40S	60 mm	400 mm	6000 mm	1,5 kN	18,59 kg


### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	P <sub>max</sub>	G
LGG 60-30-3F	60 mm	300 mm	3000 mm	1,5 kN	9,21 kg
LGG 60-40-3F	60 mm	400 mm	3000 mm	1,5 kN	9,95 kg
LGG 60-20F	60 mm	200 mm	6000 mm	1,5 kN	16,95 kg
LGG 60-30F	60 mm	300 mm	6000 mm	1,5 kN	18,42 kg
LGG 60-40F	60 mm	400 mm	6000 mm	1,5 kN	19,89 kg

**H:** height  
**B:** width  
**L:** length  
**P<sub>max</sub>:** Maximum load  
**G:** weight



## DETAILS / APPLICATIONS

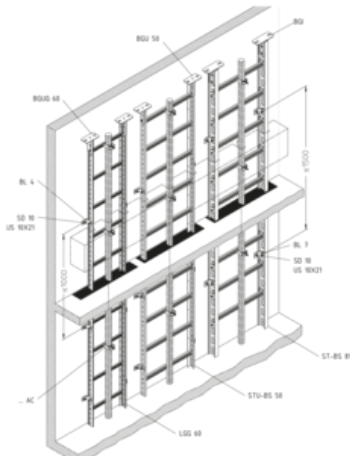

## OPTIONAL ACCESSORIES

LGV 60, BL 4, H, BGUQ-BS 60

