


## LGTR 60

cable ladder separating strip, height = 33 mm

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

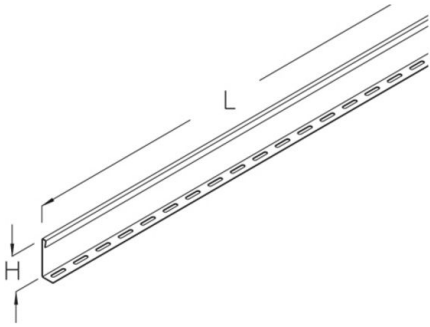

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product                    | H   | L       | G      |
|----------------------------|---|---------|--------|
| LGTR 60S                   | 33 mm   | 3000 mm | 1,5 kg |
| incl.:                     |   |         |        |
| 3x FKS 6X10<br>3x AM16 M6F | slotted cylinder head screw, DIN EN ISO 1580<br>channel nut, B7 |         |        |

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product                     | H   | L       | G      |
|-----------------------------|---|---------|--------|
| LGTR 60F                    | 33 mm   | 3000 mm | 1,6 kg |
| incl.:                      |   |         |        |
| 3x FKS 6X10E<br>3x AM16 M6F | slotted cylinder head screw, DIN EN ISO 1580<br>channel nut, B7 |         |        |

### Stainless steel, according to ASTM 304 / BS 304 S 3

| Product                      | H   | L       | G      |
|------------------------------|---|---------|--------|
| LGTR 60E                     | 33 mm   | 3000 mm | 1,5 kg |
| incl.:                       |   |         |        |
| 3x FKS 6X10E<br>3x AM16 M6E4 | slotted cylinder head screw, DIN EN ISO 1580<br>channel nut, B7 |         |        |



**H:** height  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

