


LGVV-BS 60

cable ladder connector, vertical, height = 60 mm Maintenance of function - Standard support structures

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

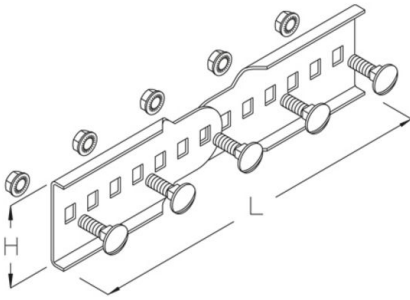

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | L | G |
|-------------|---------------------|---------|
| LGVV-BS 60S | 270 mm | 0,43 kg |
| incl.: | | |
| 5x KLS 8X16 | clamp fastening set | |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | L | G |
|--------------|---------------------|---------|
| LGVV-BS 60F | 270 mm | 0,43 kg |
| incl.: | | |
| 5x KLS 8X16E | clamp fastening set | |

L: length
G: weight

DETAILS / APPLICATIONS



