


LKDR

cablE ladder crossing cover with turning bolts

cover for cablE ladder crossing

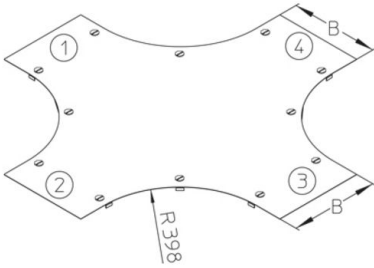

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | B | R | t | G |
|----------|--------|--------|---------|----------|
| LKDR 20S | 204 mm | 398 mm | 0,75 mm | 4,2 kg |
| LKDR 30S | 304 mm | 398 mm | 1,00 mm | 7,58 kg |
| LKDR 40S | 404 mm | 398 mm | 1,00 mm | 9,81 kg |
| LKDR 50S | 504 mm | 398 mm | 1,25 mm | 15,13 kg |
| LKDR 60S | 604 mm | 398 mm | 1,25 mm | 18,30 kg |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | B | R | t | G |
|----------|--------|--------|---------|----------|
| LKDR 20F | 204 mm | 398 mm | 0,75 mm | 4,47 kg |
| LKDR 30F | 304 mm | 398 mm | 1,00 mm | 8,09 kg |
| LKDR 40F | 404 mm | 398 mm | 1,00 mm | 10,48 kg |
| LKDR 50F | 504 mm | 398 mm | 1,25 mm | 15,23 kg |
| LKDR 60F | 604 mm | 398 mm | 1,25 mm | 19,56 kg |

Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | B | R | t | G |
|----------|--------|--------|---------|---------|
| LKDR 20E | 204 mm | 398 mm | 0,80 mm | 4,52 kg |



| Product | B | R | t | G |
|----------|--------|--------|---------|----------|
| LKDR 30E | 304 mm | 398 mm | 1,00 mm | 7,63 kg |
| LKDR 40E | 404 mm | 398 mm | 1,00 mm | 9,87 kg |
| LKDR 50E | 504 mm | 398 mm | 1,25 mm | 15,22 kg |
| LKDR 60E | 604 mm | 398 mm | 1,25 mm | 18,41 kg |

B: width
R: radius
t: material thickness
G: weight

DETAILS / APPLICATIONS

