


RB 60

cable tray bend, height = 60 mm

cable tray bend 90° for horizontal change of direction with integrated connectors

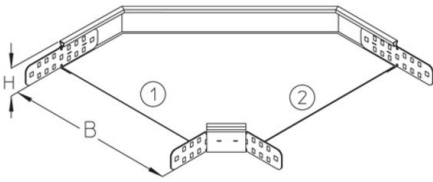

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | G |
|-----------|-------|--------|--------|
| RB 60-10S | 60 mm | 100 mm | 0,8 kg |
| incl.: | | | |
| RB 60-20S | 60 mm | 200 mm | 1,1 kg |
| incl.: | | | |
| RB 60-30S | 60 mm | 300 mm | 1,6 kg |
| incl.: | | | |
| RB 60-40S | 60 mm | 400 mm | 2,2 kg |
| incl.: | | | |
| RB 60-50S | 60 mm | 500 mm | 3,1 kg |
| incl.: | | | |
| RB 60-60S | 60 mm | 600 mm | 4 kg |
| incl.: | | | |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | G |
|-----------|-------|--------|--------|
| RB 60-10F | 60 mm | 100 mm | 0,9 kg |
| incl.: | | | |
| RB 60-20F | 60 mm | 200 mm | 1,2 kg |
| incl.: | | | |

Page 1



| Product | H | B | G |
|-----------|-------|--------|--------|
| RB 60-30F | 60 mm | 300 mm | 1,7 kg |
| incl.: | | | |
| RB 60-40F | 60 mm | 400 mm | 2,4 kg |
| incl.: | | | |
| RB 60-50F | 60 mm | 500 mm | 3,3 kg |
| incl.: | | | |
| RB 60-60F | 60 mm | 600 mm | 4,3 kg |
| incl.: | | | |


Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | H | B | G |
|-----------|---------------------|--------|--------|
| RB 60-10E | 60 mm | 100 mm | 0,7 kg |
| incl.: | | | |
| 2x KLR E | clamp fastening set | | |
| RB 60-20E | 60 mm | 200 mm | 1 kg |
| incl.: | | | |
| 2x KLR E | clamp fastening set | | |
| RB 60-30E | 60 mm | 300 mm | 1,5 kg |
| incl.: | | | |
| 2x KLR E | clamp fastening set | | |
| RB 60-40E | 60 mm | 400 mm | 2,1 kg |
| incl.: | | | |
| 2x KLR E | clamp fastening set | | |
| RB 60-50E | 60 mm | 500 mm | 2,9 kg |
| incl.: | | | |
| 2x KLR E | clamp fastening set | | |
| RB 60-60E | 60 mm | 600 mm | 3,9 kg |
| incl.: | | | |
| 2x KLR E | clamp fastening set | | |

H: height
B: width
G: weight



DETAILS / APPLICATIONS

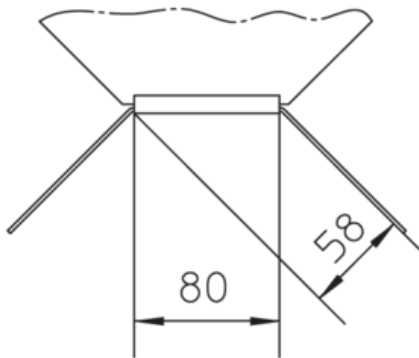

OPTIONAL ACCESSORIES

VB, RBD, RBDR, RTRV 60



UL classified

