


RB-BS 60

cable tray bend, height = 60 mm Maintenance of function - Standard support structures

cable tray bend, 90°, for horizontal change of direction with integrated connectors

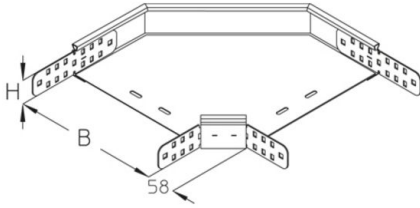

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	G
RB-BS 60-10S	60 mm	100 mm	0,80 kg
incl.: 4x KLR clamp fastening set			
RB-BS 60-20S	60 mm	200 mm	1,27 kg
incl.: 4x KLR clamp fastening set			
RB-BS 60-30S	60 mm	300 mm	1,92 kg
incl.: 4x KLR clamp fastening set			

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	G
RB-BS 60-10F	60 mm	100 mm	0,92 kg
incl.: 4x KLR E clamp fastening set			
RB-BS 60-20F	60 mm	200 mm	1,38 kg
incl.: 4x KLR E clamp fastening set			
RB-BS 60-30F	60 mm	300 mm	2,14 kg



Product	H	B	G
incl.: 4x KLR E			
	clamp fastening set		

H: height
B: width
G: weight

DETAILS / APPLICATIONS

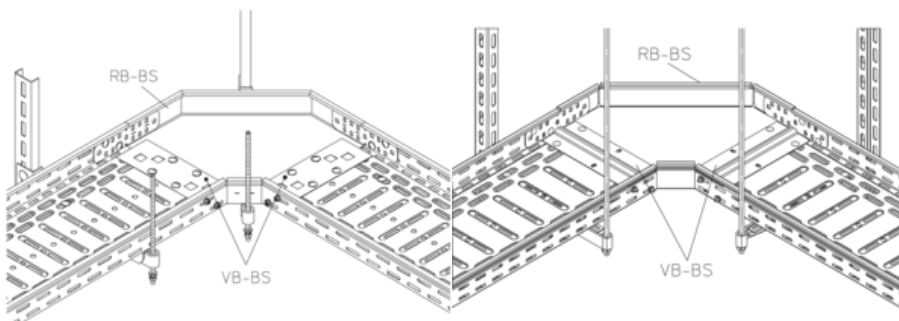

OPTIONAL ACCESSORIES

VB-BS

