


RB-BS 60

cable tray bend, height = 60 mm Maintenance of function, specified system

cable tray bend, 90°, for horizontal change of direction with integrated connectors

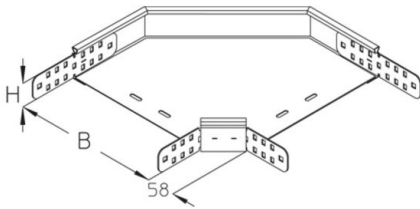

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	G
RB-BS 60-10S	60 mm	100 mm	0,80 kg
RB-BS 60-20S	60 mm	200 mm	1,27 kg
RB-BS 60-30S	60 mm	300 mm	1,92 kg
RB-BS 60-40S	60 mm	400 mm	2,75 kg
incl.: 4x KLR	clamp fastening set		

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	G
RB-BS 60-10F	60 mm	100 mm	0,92 kg
RB-BS 60-20F	60 mm	200 mm	1,38 kg
RB-BS 60-30F	60 mm	300 mm	2,14 kg
RB-BS 60-40F	60 mm	400 mm	2,46 kg
incl.: 4x KLR E	clamp fastening set		

H: height
B: width
G: weight



OPTIONAL ACCESSORIES

VB-BS

