


## RB-BS45 60

cable tray bend, height = 60 mm Maintenance of function - Standard support structures

cable tray bend 45°, for horizontal change of direction with integrated connectors

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

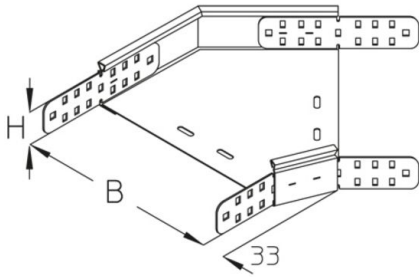

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	G
RB-BS45 60-10S	60 mm	100 mm	0,71 kg
incl.: 4x KLR clamp fastening set			
RB-BS45 60-20S	60 mm	200 mm	1,05 kg
incl.: 4x KLR clamp fastening set			
RB-BS45 60-30S	60 mm	300 mm	1,4 kg
incl.: 4x KLR clamp fastening set			

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	G
RB-BS45 60-10F	60 mm	100 mm	0,64 kg
incl.: 4x KLR E clamp fastening set			
RB-BS45 60-20F	60 mm	200 mm	0,9 kg
incl.: 4x KLR E clamp fastening set			
RB-BS45 60-30F	60 mm	300 mm	1,49 kg



Product	H	B	G
incl. 4x KLR E	clamp fastening set		

---

**H:** height  
**B:** width  
**G:** weight

## OPTIONAL ACCESSORIES

VB-BS

