


RB-BS45 60

cable tray bend, height = 60 mm Maintenance of function, specified system

cable tray bend 45°, for horizontal change of direction with integrated connectors

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

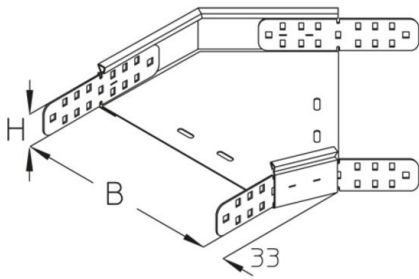

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	G
RB-BS45 60-10S	60 mm	100 mm	0,71 kg
RB-BS45 60-20S	60 mm	200 mm	1,05 kg
RB-BS45 60-30S	60 mm	300 mm	1,4 kg
RB-BS45 60-40S	60 mm	400 mm	1,84 kg
incl.: 4x KLR	clamp fastening set		

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	G
RB-BS45 60-10F	60 mm	100 mm	0,64 kg
RB-BS45 60-20F	60 mm	200 mm	0,9 kg
RB-BS45 60-30F	60 mm	300 mm	1,49 kg
RB-BS45 60-40F	60 mm	400 mm	1,87 kg
incl.: 4x KLR E	clamp fastening set		

H: height
B: width
G: weight



OPTIONAL ACCESSORIES

VB-BS

