


## RB45 35

cable tray bend, height = 35 mm

cable tray bend 45°, for horizontal change of direction, with integrated connectors

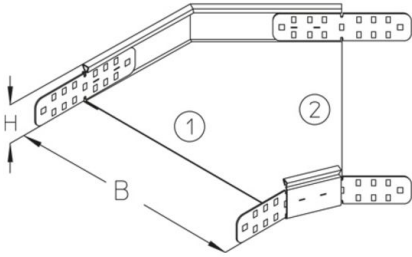

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	G
RB45 35-10S	35 mm	100 mm	0,45 kg
RB45 35-20S	35 mm	200 mm	0,85 kg
RB45 35-30S	35 mm	300 mm	1,07 kg


### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	G
RB45 35-10F	35 mm	100 mm	0,48 kg
RB45 35-20F	35 mm	200 mm	0,77 kg
RB45 35-30F	35 mm	300 mm	1,15 kg

**H:** height  
**B:** width  
**G:** weight

## DETAILS / APPLICATIONS



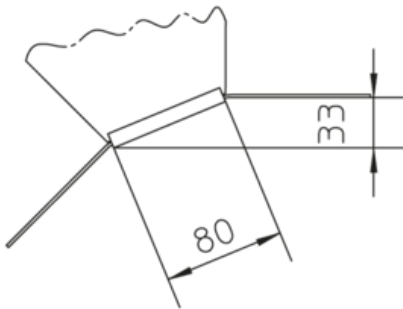

## OPTIONAL ACCESSORIES

VB, RTRV 35



UL classified

