


RD-SW

cable tray storm protection angle

protection angle for additional securing of cable tray covers especially in outdoor use

Storm protection angles, suitable for outdoor use. According to assembly instructions you should use at least 6 safety elements for each 3 meters cable path cover.

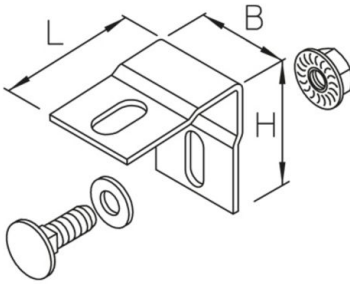

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	G
RD-SW F	45 mm	30 mm	43 mm	0,06 kg
incl.:				
1x FRSV 6X12E	round-head screw with short square, DIN 603			
1x SEMS 6E	hexagon-nut with flange, DIN EN 1661			
1x UVS M6	captive washer			

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	G
RD-SW E	45 mm	30 mm	43 mm	0,06 kg
incl.:				
1x FRSV 6X12E	round-head screw with short square, DIN 603			
1x SEMS 6E	hexagon-nut with flange, DIN EN 1661			
1x UVS M6	captive washer			

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	G
RD-SW E4	45 mm	30 mm	43 mm	0,05 kg



Product	H	B	L	G
incl.: 1x FRSV 6X12E4 1x SEM 6E4 1x UVS M6				
		round-head screw with short square, DIN 603 hexagon-nut, DIN 934 captive washer		

H: height
B: width
L: length
G: weight

DETAILS / APPLICATIONS

