

## RG 60

cable tray, perforated, height = 60 mm

cable tray perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	A	Q <sub>SK</sub>	G
RG 60-05S	60 mm	50 mm	3000 mm	0,75 mm	27 cm <sup>2</sup>	0,04 kN/m	3,40 kg
RG 60-10S	60 mm	100 mm	3000 mm	0,75 mm	57 cm <sup>2</sup>	0,09 kN/m	4,30 kg
RG 60-20S	60 mm	200 mm	3000 mm	0,75 mm	117 cm <sup>2</sup>	0,18 kN/m	5,80 kg
RG 60-30S	60 mm	300 mm	3000 mm	0,75 mm	177 cm <sup>2</sup>	0,27 kN/m	7,40 kg
RG 60-40S	60 mm	400 mm	3000 mm	0,88 mm	237 cm <sup>2</sup>	0,36 kN/m	10,60 kg
RG 60-50S	60 mm	500 mm	3000 mm	1,00 mm	297 cm <sup>2</sup>	0,45 kN/m	14,20 kg
RG 60-60S	60 mm	600 mm	3000 mm	1,00 mm	357 cm <sup>2</sup>	0,54 kN/m	16,40 kg

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	Q <sub>SK</sub>	G
RG 60-05F	60 mm	50 mm	3000 mm	0,75 mm	27 cm <sup>2</sup>	0,04 kN/m	3,80 kg
RG 60-10F	60 mm	100 mm	3000 mm	0,75 mm	57 cm <sup>2</sup>	0,09 kN/m	4,80 kg
RG 60-20F	60 mm	200 mm	3000 mm	0,75 mm	117 cm <sup>2</sup>	0,18 kN/m	6,50 kg
RG 60-30F	60 mm	300 mm	3000 mm	0,75 mm	177 cm <sup>2</sup>	0,27 kN/m	8,30 kg
RG 60-40F	60 mm	400 mm	3000 mm	0,88 mm	237 cm <sup>2</sup>	0,36 kN/m	11,70 kg
RG 60-50F	60 mm	500 mm	3000 mm	1,00 mm	297 cm <sup>2</sup>	0,45 kN/m	15,70 kg
RG 60-60F	60 mm	600 mm	3000 mm	1,00 mm	357 cm <sup>2</sup>	0,54 kN/m	18,10 kg




Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	t	A	Q <sub>SK</sub>	G
RG 60-05E	60 mm	50 mm	3000 mm	0,80 mm	27 cm <sup>2</sup>	0,04 kN/m	3,60 kg
RG 60-10E	60 mm	100 mm	3000 mm	0,80 mm	57 cm <sup>2</sup>	0,09 kN/m	4,60 kg
RG 60-20E	60 mm	200 mm	3000 mm	0,80 mm	117 cm <sup>2</sup>	0,18 kN/m	6,20 kg
RG 60-30E	60 mm	300 mm	3000 mm	0,80 mm	177 cm <sup>2</sup>	0,27 kN/m	8,00 kg
RG 60-40E	60 mm	400 mm	3000 mm	0,80 mm	237 cm <sup>2</sup>	0,36 kN/m	9,90 kg
RG 60-50E	60 mm	500 mm	3000 mm	1,00 mm	297 cm <sup>2</sup>	0,45 kN/m	14,30 kg
RG 60-60E	60 mm	600 mm	3000 mm	1,00 mm	357 cm <sup>2</sup>	0,54 kN/m	16,60 kg

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**A:** cross section area  
**Q<sub>SK</sub>:** distributed load control cable  
**G:** weight

## DETAILS / APPLICATIONS

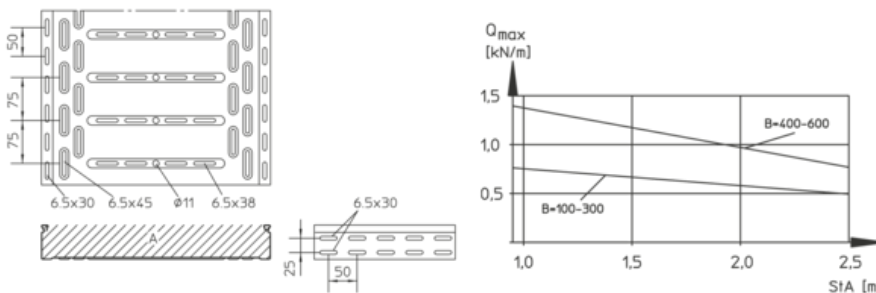

## OPTIONAL ACCESSORIES

MA 60, RB 60, RB45 60, RBV 60, RAE 60, RAA 60, RA 60, RK 60, RVB 60, RR 60, RAB 60, REB, RGV 60, RGVS 60, VB, RTR 60, RKAB, KLR, RD, RDR





Do not walk upon!



UL classified

