


SD

expansion anchor

Permissible as single fastening. Permissible load in cracked and non-cracked normal concrete of strength f_{ctk} C20/25. Manufacturer's information has to be observed strictly (ETA-05/0069).

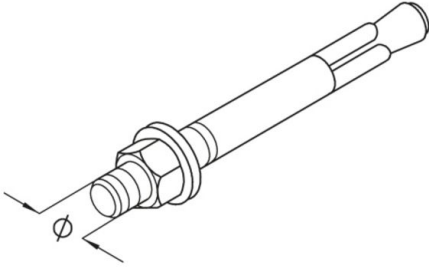

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	L _{min}	D	Ø	t	Pzul	PzulR30	PzulR90	G
SDK 10/10	55 mm	10 mm	10 mm	0-10 mm	4,3 kN	1,8 kN	1,8 kN	5,88 kg/100
SD 8/10	55 mm	8 mm	8 mm	0-10 mm	3,6 kN	1,4 kN	0,9 kN	3,5 kg/100
SD 8/30	55 mm	8 mm	8 mm	0-30 mm	3,6 kN	1,4 kN	0,9 kN	4,4 kg/100
SD 10/10	75 mm	10 mm	10 mm	0-10 mm	5,7 kN	2,8 kN	1,9 kN	6,2 kg/100
SD 10/30	75 mm	10 mm	10 mm	0-30 mm	5,7 kN	2,8 kN	1,9 kN	7,8 kg/100
SD 12/10	90 mm	12 mm	12 mm	0-10 mm	9,5 kN	5,0 kN	3,2 kN	11 kg/100
SD 16/25	110 mm	16 mm	16 mm	0-25 mm	13,4 kN	9,4 kN	6,0 kN	26,3 kg/100

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	L _{min}	D	Ø	t	Pzul	PzulR30	PzulR90	G
SD 8/10E4	55 mm	8 mm	8 mm	0-10 mm	3,6 kN	1,4 kN	0,9 kN	3,6 kg/100
SD 10/10E4	75 mm	10 mm	10 mm	0-10 mm	5,7 kN	2,8 kN	1,9 kN	6,2 kg/100
SD 10/30E4	75 mm	10 mm	10 mm	0-30 mm	5,7 kN	2,8 kN	1,9 kN	7,1 kg/100
SD 12/10E4	90 mm	12 mm	12 mm	0-10 mm	9,5 kN	5,0 kN	3,2 kN	10,9 kg/100

L_{min}: Minimum drilling depth

D: diameter

Ø: diameter

t: material thickness



Pzul: permissible tractive force

PzulR30: permissible tensile load under the influence of fire (30min)

PzulR90: permissible tensile load under the influence of fire (90min)

G: weight

DETAILS / APPLICATIONS

