


**SLV**  
ship ladder connector

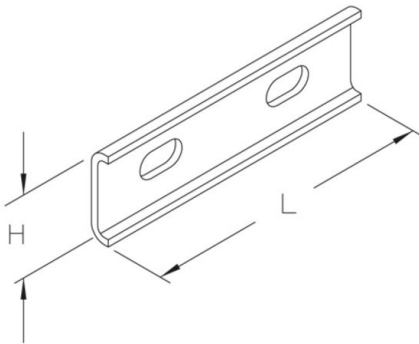

Bright rolled

Product	H	L	G
SLV B	38 mm	120 mm	0,1 kg
incl.: 2x KLS 10X20F clamp fastening set			

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
SLV F	38 mm	120 mm	0,1 kg
incl.: 2x KLS 10X20F clamp fastening set			

weld-primed

Product	H	L	G
SLV M	38 mm	120 mm	0,1 kg
incl.: 2x KLS 10X20F clamp fastening set			

H: height



