


SR

protective tube, length = 6000 mm

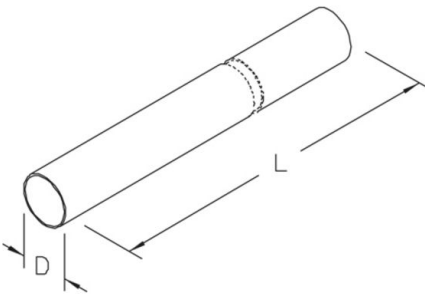

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	L	D	t	G
SR 30F	6000 mm	30 mm	1,50 mm	6,65 kg
SR 60F	6000 mm	60 mm	2,00 mm	17,4 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	L	D	t	G
SR 30E	6000 mm	30 mm	1,50 mm	6,65 kg
SR 60E	6000 mm	60 mm	2,00 mm	17,4 kg

L: length
D: diameter
t: material thickness
G: weight

DETAILS / APPLICATIONS



