


## SRL

protective tube, slotted, length = 6000 mm

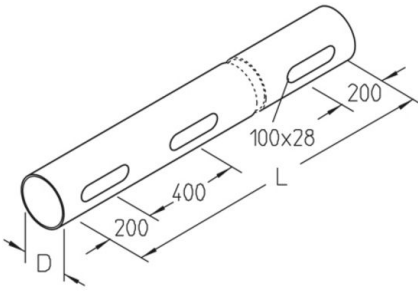

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	L	D	t	G
SRL 60F	6000 mm	60 mm	2,00 mm	16,3 kg





Stainless steel, according to ASTM 304 / BS 304 S 3

Product	L	D	t	G
SRL 60E	6000 mm	60 mm	2,00 mm	16,3 kg

**L:** length  
**D:** diameter  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



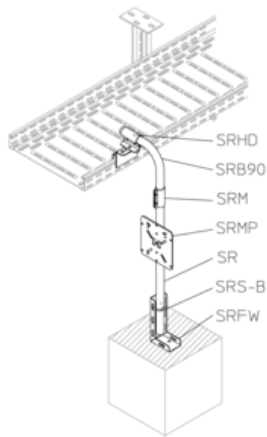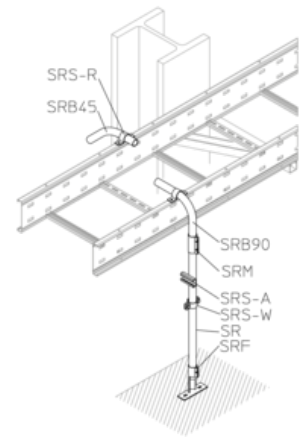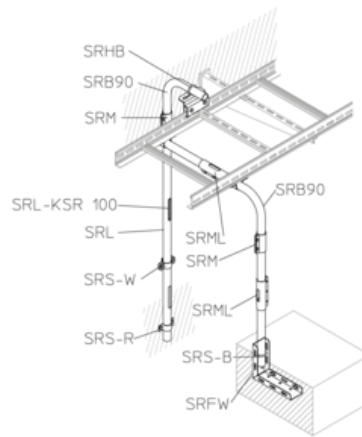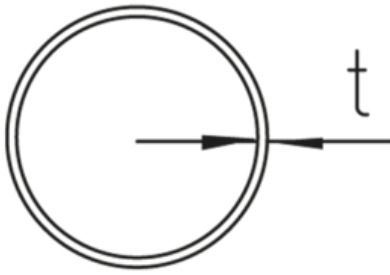

## OPTIONAL ACCESSORIES

SRL-KSR 100

