


UBKIB

inward profile bend

Hot-dip galvanized inward profile bend as accessory for screed-flush heavy-duty ducts, for construction of formed components.

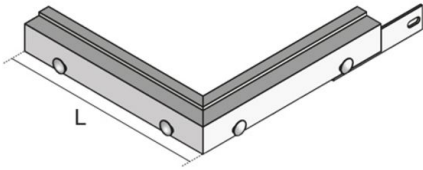

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	L	G
UBKIB5F	300 mm	2,5 kg
incl.:		
1x UBKPRV	connector	
4x FRS 8X25	round-head screw with square, DIN 603	
4x SEMS 8	hexagon-nut with flange, DIN EN 1661	
UBKIB8F	300 mm	3 kg
incl.:		
1x UBKPRV	connector	
4x FRS 8X25	round-head screw with square, DIN 603	
4x SEMS 8	hexagon-nut with flange, DIN EN 1661	
UBKIB10F	300 mm	3,6 kg
incl.:		
1x UBKPRV	connector	
4x FRS 8X25	round-head screw with square, DIN 603	
4x SEMS 8	hexagon-nut with flange, DIN EN 1661	

L: length
G: weight

OPTIONAL ACCESSORIES

UBKV

