


UBSK V E

cleaning socket, single, angular, levelable



Angular cleaning socket made of high-grade steel sheet with a hem. Incl. white single isolated ground receptacle. As levellable unit with cartridge cover, retainer box made of sheet steel. For direct installation in screed floors. Suitable for rooms with low floor build-up and dry to moist maintained floor coverings. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	Cassette: 2 mm stainless steel V2A, frame: 1.5 mm stainless steel V2A
type of assembly	Mounting on raw concrete ceiling
application area	dry cleaning of the floor
norm	according to DIN EN 50085
permits	according to VDE/TÜV
protection class	in use IP 20 / not in use IP 40
loading	2 kN

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H _{min}	N	B	L	E	P _{max}	IP _n	IP _g	G
UBSK-V W1 E	19 mm	55 mm	15 mm	100 mm	100 mm	105 x 110 mm	2 kN	IP 40	IP 20	0,70 kg

H: height

H_{min}: Minimum installation height

N: levelling range

B: width

L: length

E: fitting dimension

P_{max}: Maximum load


IP_n: IP protection level in unused condition

IP_g: IP protection level in used condition

G: weight



DETAILS / APPLICATIONS

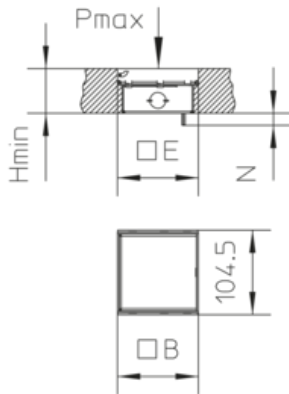

dry-cleaned

