


## UBSK VP E

cleaning socket, single, angular, levelable



Angular cleaning socket made of high-grade steel sheet with a hem and plane cable outlet cartridge. Flat surface, blasted. Incl. white single isolated ground receptacle. As levellable unit with cartridge cover, retainer box made of sheet steel. For direct installation in screed floors. Suitable for rooms with low floor build-up and wet-cleaned floor coverings. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	Cassette: 2 mm stainless steel V2A, frame: 1.5 mm stainless steel V2A
type of assembly	Mounting on the raw concrete ceiling and installation in the screed
application area	wet floor cleaning
norm	according to DIN EN 50085
permits	according to VDE/TÜV
protection class	in use IP 20 / not in use IP 54
loading	2 kN


### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H <sub>min</sub>	N	B	L	E	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
UBSK-VP W1 E	19 mm	55 mm	15 mm	100 mm	100 mm	105 x 110 mm	2 kN	IP 54	IP 20	0,92 kg

**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**N:** levelling range  
**B:** width  
**L:** length  
**E:** fitting dimension  
**P<sub>max</sub>:** Maximum load  
**IP<sub>n</sub>:** IP protection level in unused condition  
**IP<sub>g</sub>:** IP protection level in used condition  
**G:** weight



## DETAILS / APPLICATIONS

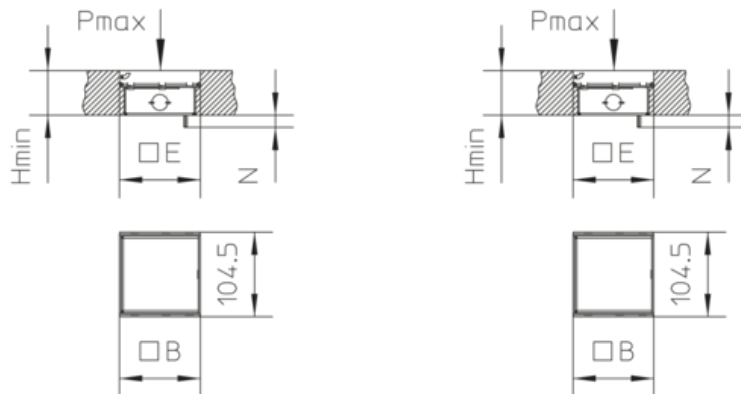

wet-cleaned

