


UEKDD2 V E

stainless steel hinged cover cartridge, double, angular



Quadrangular installation unit with high-grade steel carpet protection frame. As cartridge installation frame with lock-in leads for the gradual lowering of up to 2 mounting boxes (6 coulter clip installation devices or 8 installation devices of 45x45mm) by up to 30 mm, self-locking hinged cover as a cartridge with floor flush cable outlet and a self-closing opening lever, rubber seal and all-purpose mounting claw set. For installation into floor boxes, assembly covers and raised or hollow floor openings. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2 mm high-grade steel V2A
type of assembly	Assembly in floor box UBDHB, double or hollow floor openings
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 mm: 1.5 kN

Stainless steel, according to ASTM 304 / BS 304 S 3


Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEKDD2 15-V E	72 mm	90 mm	210 mm	283 mm	261 x 186 mm	12 mm	1,5 kN	IP 30	IP 20	1,71 kg
incl.:										
1x UGD2-V 2					rubber seal, angular					
2x UDBS 40-80					special claw					
UEKDD2 25-V E	82 mm	100 mm	210 mm	283 mm	261 x 186 mm	22 mm	1,5 kN	IP 30	IP 20	2,50 kg
incl.:										
1x UGD2-V 2					rubber seal, angular					
2x UDBS 40-80					special claw					

Page 1



H: height
H_{min}: Minimum installation height
B: width
L: length
E: fitting dimension
T: depth
P_{max}: Maximum load
IP_n: IP protection level in unused condition
IP_g: IP protection level in used condition
G: weight

DETAILS / APPLICATIONS

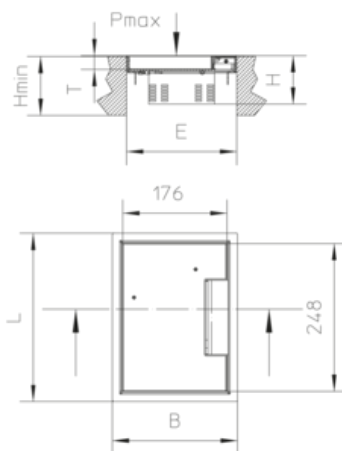

OPTIONAL ACCESSORIES

UDBS 40-80



dry-cleaned

