


UEKDS V E

stainless steel hinged cover unit with steel inlay, triple, angular

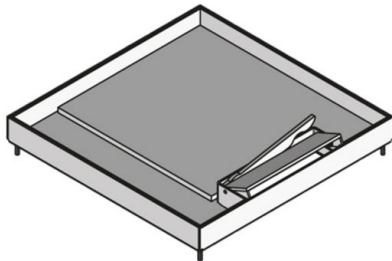

Quadrangular cartridge made of stainless steel sheet with hem. As a cartridge installation frame with cable outlet cartridge, steel insert, floor-level cable outlet, self-closing opening lever, rubber seal and fastening bolts for mounting on levelling units in floor boxes, assembly covers and in raised or hollow floor openings. To accommodate up to 3 mounting boxes equipped with up to 9 suspension bracket installation devices or 12 installation devices of 45x45 mm. Suitable for rooms with dry and damp-cleaned floor covers. Designed for high traffic loads.

On request deliverable in the material brass. Please mind the technical information in chapter planning.



material	cartridge and frame: 2mm high-grade steel V2A, steel insert: hot dip galvanized steel panel
type of assembly	fastening to floor box UBDHB7levelling unit UNE
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 mm: 3 kN

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEKDS 25-V6 E	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	16 mm	10 kN	IP 30	IP 20	4,8 kg
incl.:										
4x UKS M4X16E					Phillips screw					
1x UGD-V 2					rubber seal, square					
UEKDS 35-V6 E	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	26 mm	10 kN	IP 30	IP 20	5 kg
incl.:										
4x UKS M4X16E					Phillips screw					
1x UGD-V 2					rubber seal, square					


Page 1



Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEKDS 45-V6 E	49 mm	115 mm	258 mm	258 mm	261 x 261 mm	36 mm	10 kN	IP 30	IP 20	5,2 kg
incl.:										
4x UKS M4X16E					Phillips screw					
1x UGD-V 2					rubber seal, square					

H: height
H_{min}: Minimum installation height
B: width
L: length
E: fitting dimension
T: depth
P_{max}: Maximum load
IP_n: IP protection level in unused condition
IP_g: IP protection level in used condition
G: weight

DETAILS / APPLICATIONS

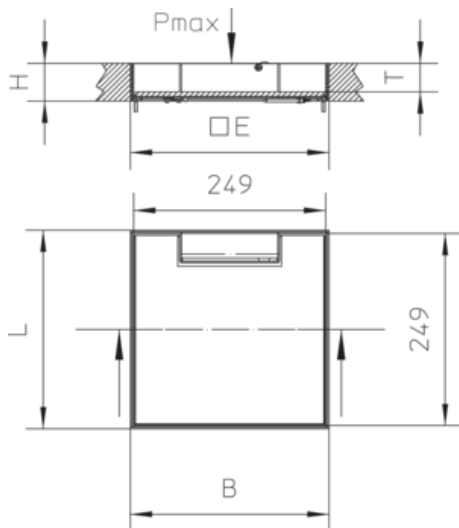

OPTIONAL ACCESSORIES

UNE





dry-cleaned

