


## UKE185 V

stainless steel hinged cover compact single-outlet, octuple, angular



Consisting of floor box inclusive square single outlet and shuttering formwork, as concealed shuttering for direct installation in floor screed. as a height-adjustable cartridge installation frame with cable outlet cartridge, hem, self-locking opening lever, floor-flush cable outlet and rubber seal to accommodate up to eight installation devices, 45x45mm With perforations on the side panels for the introduction of tubes M25. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.



|         |                           |
|---------|---------------------------|
| norm    | according to DIN EN 50085 |
| permits | according to VDE / TÜV    |


Stainless steel, according to ASTM 304 / BS 304 S 3

| Product          | H     | H <sub>min</sub> | N     | B      | L      | E            | T     | P <sub>max</sub> | IP <sub>n</sub> | IP <sub>g</sub> | G       |
|------------------|-------|------------------|-------|--------|--------|--------------|-------|------------------|-----------------|-----------------|---------|
| UKE185 15-V<br>E | 15 mm | 90 mm            | 35 mm | 184 mm | 258 mm | 190 x 264 mm | 12 mm | 2 kN             | IP 30           | IP 20           | 3,28 kg |
| UKE185 25-V<br>E | 25 mm | 100 mm           | 35 mm | 184 mm | 258 mm | 190 x 264 mm | 22 mm | 2 kN             | IP 30           | IP 20           | 3,65 kg |

- H:** height
- H<sub>min</sub>:** Minimum installation height
- N:** levelling range
- B:** width
- L:** length
- E:** fitting dimension
- T:** depth
- P<sub>max</sub>:** Maximum load
- IP<sub>n</sub>:** IP protection level in unused condition
- IP<sub>g</sub>:** IP protection level in used condition
- G:** weight



## DETAILS / APPLICATIONS

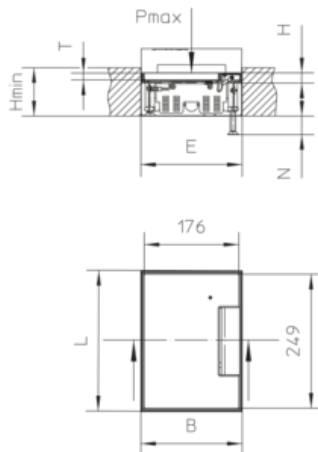

## OPTIONAL ACCESSORIES

UG3, UKENP 185



dry-cleaned

