


## UNSKH V

heat resistant shuttering unit, levellable, angular

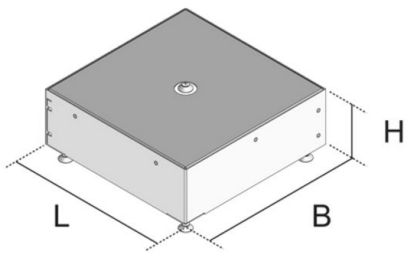

Shuttering unit, levellable, quadrangular, in floor boxes or cable duct mounting cover, consisting of a sendzimir galvanized steel sheet frame, an internal levelling device including levelling bases and cover. As concealed shuttering for quadrangular installation units, sandable and heat resistant. Suitable for installation in cast asphalt/hot asphalt or terrazzo.

material	sheet steel, hot-dip galvanized
type of assembly	placed on raw concrete floor
application area	screed-covered duct system
norm	according to DIN EN 50085
permits	according to VDE / TÜV

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H <sub>min</sub>	N	B	L	G
UNSKH 260V-100S	96 mm	100 mm	55 mm	259 mm	259 mm	1,53 kg
UNSKH 260V-155S	96 mm	155 mm	70 mm	259 mm	259 mm	2,64 kg

**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**N:** levelling range  
**B:** width  
**L:** length  
**G:** weight

