


UST45 3

shockproof socket, triple

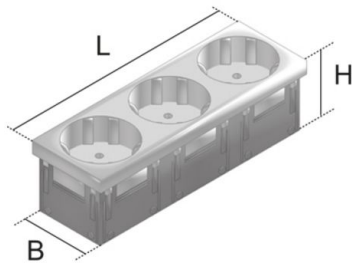

One-piece latchable triple isolated ground receptacle, 45x45 mm design made of plastic with 33° plugging angle, push terminals, increased contact protection according to VDE 0620 and nominal voltage/- current: AC 250 V, 10/16 A.

Polycarbonate

Product	H	B	L	color	plug angle	G
UST45-W 3	42 mm	40 mm	135 mm	white (similar to RAL 9010)	33 °	0,11 kg
UST45-R 3	42 mm	40 mm	135 mm	red (similar to RAL 3003)	33 °	0,11 kg
UST45-O 3	42 mm	40 mm	135 mm	orange (similar to RAL 2004)	33 °	0,11 kg
UST45-G 3	42 mm	40 mm	135 mm	green (similar to RAL 6029)	33 °	0,11 kg

H: height

B: width

L: length

color:

plug angle:

G: weight

OPTIONAL ACCESSORIES

UAM 4, UAA B

