


UST45 4

shockproof socket, quadruple

One-piece latchable quadruple isolated ground receptacle, 45x45 mm design made of plastic with 45° plugging angle, push terminals, increased contact protection according to VDE 0620 and nominal voltage/- current: AC 250 V, 10/16 A.

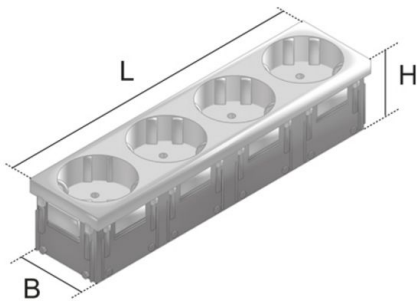

Polycarbonate

| Product | H | B | L | color | plug angle | G |
|-----------|-------|-------|--------|-----------------------------|------------|---------|
| UST45-W 4 | 40 mm | 40 mm | 180 mm | white (similar to RAL 9003) | 45 ° | 0,12 kg |
| UST45-R 4 | 40 mm | 40 mm | 180 mm | red (similar to RAL 3000) | 45 ° | 0,12 kg |

H: height

B: width

L: length

color:

plug angle:

G: weight

OPTIONAL ACCESSORIES

UAM 4

