


VB-BS

connection plate Maintenance of function, specified system

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

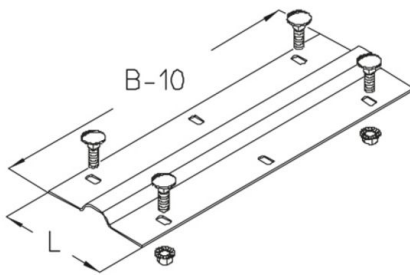

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	G
VB-BS 10S	100 mm	99 mm	0,10 kg
VB-BS 20S	200 mm	99 mm	0,21 kg
VB-BS 30S	300 mm	99 mm	0,31 kg
VB-BS 40S	400 mm	99 mm	0,43 kg
incl.: 2x KLR	clamp fastening set		

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	G
VB-BS 10F	100 mm	99 mm	0,10 kg
VB-BS 20F	200 mm	99 mm	0,23 kg
VB-BS 30F	300 mm	99 mm	0,33 kg
VB-BS 40F	400 mm	99 mm	0,45 kg
incl.: 2x KLR E	clamp fastening set		

B: width
L: length
G: weight



DETAILS / APPLICATIONS

