


WLA 200

wide-span cable ladder branch, height = 200 mm

wide-span branch, formed component, integrated connectors included

Formed components must be supported at all sides.

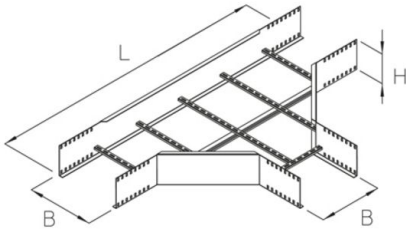

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	L	G
WLA 200-20F	208 mm	200 mm	1667 mm	22,84 kg
incl.: 24x FRSV 10X20F 24x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLA 200-30F	208 mm	300 mm	1767 mm	23,96 kg
incl.: 24x FRSV 10X20F 24x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLA 200-40F	208 mm	400 mm	1867 mm	25,07 kg
incl.: 24x FRSV 10X20F 24x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLA 200-50F	208 mm	500 mm	1967 mm	26,80 kg
incl.: 24x FRSV 10X20F 24x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLA 200-60F	208 mm	600 mm	2067 mm	27,98 kg
incl.: 24x FRSV 10X20F 24x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				

H: height
B: width
L: length



G: weight

DETAILS / APPLICATIONS

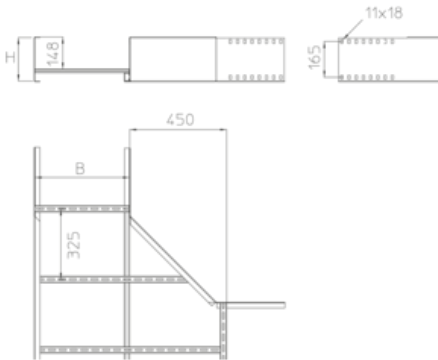

OPTIONAL ACCESSORIES

WLAD, WLADR, WTRV 200

