


WLB 200

wide-span cable ladder bend, height = 200 mm

wide-span bend 90° for horizontal change of direction, with integrated connectors

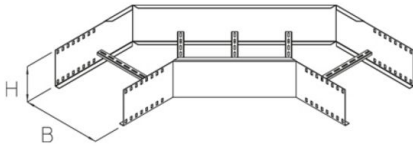

Formed components must be supported at all sides.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


| Product | H | B | L | G |
|---|--------|--------|---------|----------|
| WLB 200-20F | 204 mm | 200 mm | 952 mm | 16,03 kg |
| incl.: 16x FRSV 10X20F 16x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934 | | | | |
| WLB 200-30F | 204 mm | 300 mm | 1052 mm | 17,26 kg |
| incl.: 16x FRSV 10X20F 16x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934 | | | | |
| WLB 200-40F | 204 mm | 400 mm | 1152 mm | 18,51 kg |
| incl.: 16x FRSV 10X20F 16x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934 | | | | |
| WLB 200-50F | 204 mm | 500 mm | 1252 mm | 19,75 kg |
| incl.: 16x FRSV 10X20F 16x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934 | | | | |
| WLB 200-60F | 204 mm | 600 mm | 1352 mm | 20,98 kg |
| incl.: 16x FRSV 10X20F 16x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934 | | | | |

H: height
B: width
L: length



G: weight

DETAILS / APPLICATIONS

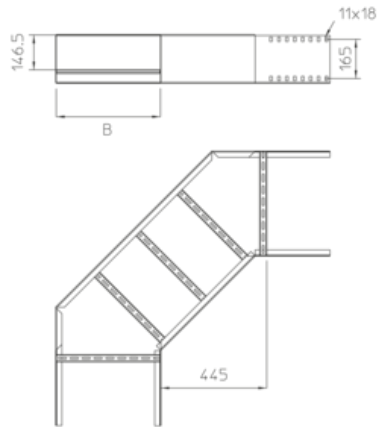

OPTIONAL ACCESSORIES

WLBD, WLBDR, WTRV 200

