


WLK 200

wide-span cable ladder crossing, height = 200 mm

wide-span crossing for horizontal change of direction, with integrated connectors

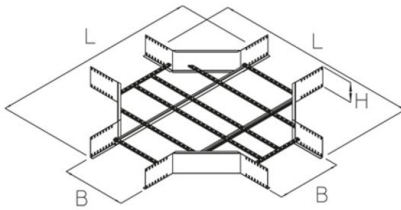

Formed components must be supported at all sides.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	L	G
WLK 200-20F	208 mm	237 mm	1667 mm	33,36 kg
incl.: 32x FRSV 10X20F 32x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLK 200-30F	208 mm	337 mm	1767 mm	34,35 kg
incl.: 32x FRSV 10X20F 32x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLK 200-40F	208 mm	437 mm	1867 mm	35,29 kg
incl.: 32x FRSV 10X20F 32x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLK 200-50F	208 mm	537 mm	1967 mm	37,06 kg
incl.: 32x FRSV 10X20F 32x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				
WLK 200-60F	208 mm	637 mm	2067 mm	38,08 kg
incl.: 32x FRSV 10X20F 32x SEM 10F round-head screw with short square, DIN 603 hexagon-nut, DIN 934				

H: height
B: width
L: length



G: weight

DETAILS / APPLICATIONS

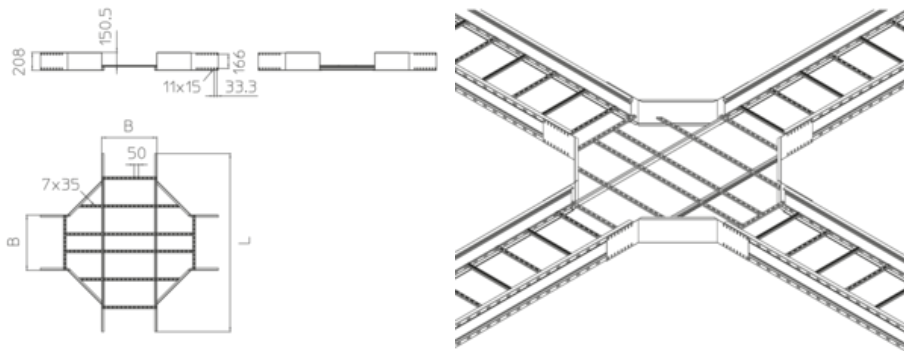

OPTIONAL ACCESSORIES

WLKD, WLKDR, WTRV 200

