

WLKLA

clamping assembly - wide-span cable ladder

Suitable for wide-span cable tray WL(R) 200.

Applies only for securing the position.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | B | L | t | G |
|-------------|--|-------|------|---------|
| WLKLA S | 40 mm | 60 mm | 3 mm | 0,09 kg |
| incl.: | | | | |
| 1x SES 6X20 | hexagon head bolt, DIN 933 | | | |
| 1x AMF22 M6 | channel spring nut, A41, KHA 41, KHAL 41 | | | |


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | B | L | t | G |
|--------------|--|-------|------|---------|
| WLKLA F | 40 mm | 60 mm | 3 mm | 0,09 kg |
| incl.: | | | | |
| 1x SES 6X20E | hexagon head bolt, DIN 933 | | | |
| 1x AMF22 M6F | channel spring nut, A41, KHA 41, KHAL 41 | | | |

B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS



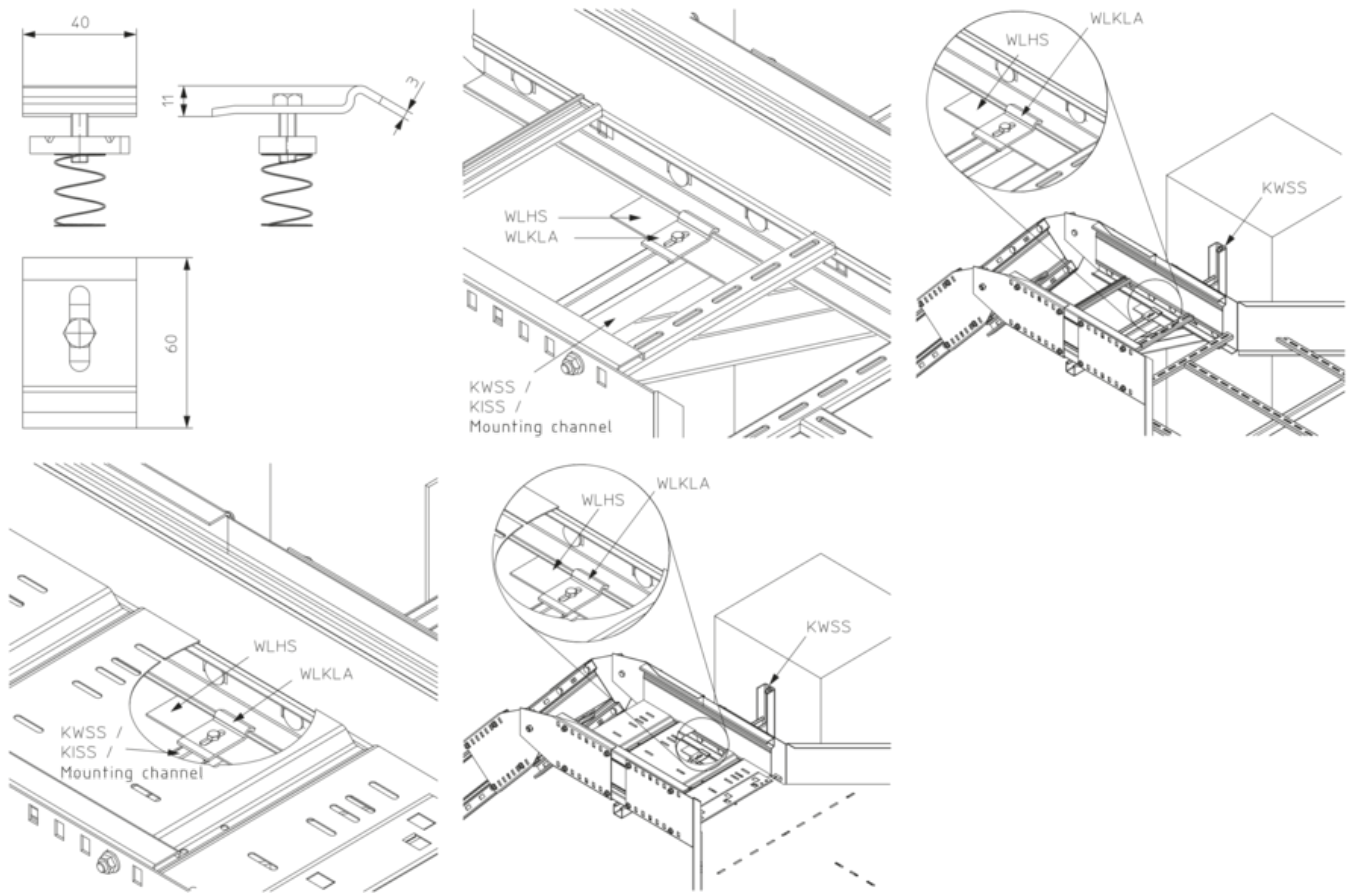

OPTIONAL ACCESSORIES

WLHS

