


WLRA 200

wide-span cable tray branch, height = 200 mm

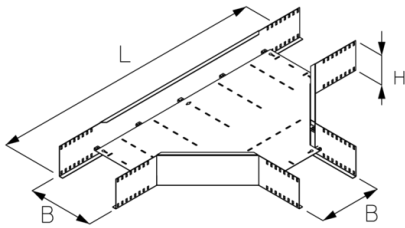

The T-shaped wide span cable tray branch WLRA 200 with integrated side connectors enables directional changes of cable routing in the form of a branch. It is suitable for WLR 200 wide span cable trays and has widths from 200 to 600 mm. It is inserted between two wide span cable trays. The connection trough can then be inserted with a VB floor connector. Various materials and surfaces ensure that the corrosion protection requirements of a wide range of applications are met.

- Allows horizontal change of direction of cable routing in the form of a branch
- Cable gentle guidance

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	L	G
WLRA 200-20F	208 mm	200 mm	1667 mm	26,66 kg
incl.:				
7x FRSV 6X12E		round-head screw with short square, DIN 603		
7x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
24x SEM 10F		hexagon-nut, DIN 934		
24x FRSV 10X20F		round-head screw with short square, DIN 603		
24x US 10X21F		washer, DIN EN ISO 7089		
WLRA 200-30F	208 mm	300 mm	1767 mm	28,99 kg
incl.:				
7x FRSV 6X12E		round-head screw with short square, DIN 603		
7x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
24x SEM 10F		hexagon-nut, DIN 934		
24x FRSV 10X20F		round-head screw with short square, DIN 603		
24x US 10X21F		washer, DIN EN ISO 7089		
WLRA 200-40F	208 mm	400 mm	1867 mm	31,43 kg
incl.:				
7x FRSV 6X12E		round-head screw with short square, DIN 603		
7x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
24x SEM 10F		hexagon-nut, DIN 934		
24x FRSV 10X20F		round-head screw with short square, DIN 603		
24x US 10X21F		washer, DIN EN ISO 7089		
WLRA 200-50F	208 mm	500 mm	1967 mm	34,63 kg



Product	H	B	L	G
incl.: 7x FRSV 6X12E 7x SEMS 6E 24x SEM 10F 24x FRSV 10X20F 24x US 10X21F				
round-head screw with short square, DIN 603 hexagon-nut with flange, DIN EN 1661 hexagon-nut, DIN 934 round-head screw with short square, DIN 603 washer, DIN EN ISO 7089				
WLRA 200-60F	208 mm	600 mm	2067 mm	37,40 kg
incl.: 7x FRSV 6X12E 7x SEMS 6E 24x SEM 10F 24x FRSV 10X20F 24x US 10X21F				
round-head screw with short square, DIN 603 hexagon-nut with flange, DIN EN 1661 hexagon-nut, DIN 934 round-head screw with short square, DIN 603 washer, DIN EN ISO 7089				

H: height
B: width
L: length
G: weight

DETAILS / APPLICATIONS

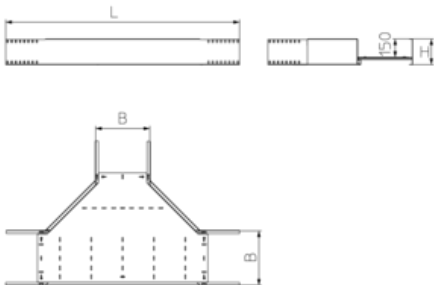

OPTIONAL ACCESSORIES

WLAD, WLADR, WTRV 200

