


WLRK 200

Wide span cable tray crossing, height = 200 mm

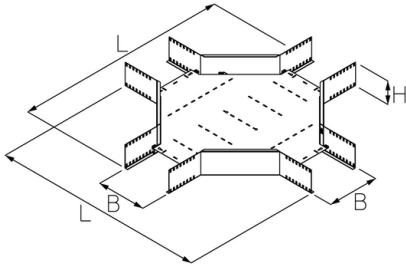

The WLRK 200 wide span cable tray crossing with integrated connectors serves as a molded part for horizontally crossing wide span cable trays. It is suitable for WLR 200 wide span cable trays and has widths from 200 to 600 mm. The cable trays can be inserted with a VB floor connector. Various materials and surfaces ensure that the corrosion protection requirements of a wide range of applications are met.

- Allows horizontal change of cable routing in four directions
- Gentle cable guidance

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	L	G
WLRK 200-20F	208 mm	237 mm	1667 mm	39,11 kg
incl.:				
10x FRSV 6X12E		round-head screw with short square, DIN 603		
10x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
32x SEM 10F		hexagon-nut, DIN 934		
32x FRSV 10X20F		round-head screw with short square, DIN 603		
32x US 10X21F		washer, DIN EN ISO 7089		
WLRK 200-30F	208 mm	337 mm	1767 mm	41,60 kg
incl.:				
10x FRSV 6X12E		round-head screw with short square, DIN 603		
10x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
32x SEM 10F		hexagon-nut, DIN 934		
32x FRSV 10X20F		round-head screw with short square, DIN 603		
32x US 10X21F		washer, DIN EN ISO 7089		
WLRK 200-40F	208 mm	437 mm	1867 mm	44,17 kg
incl.:				
10x FRSV 6X12E		round-head screw with short square, DIN 603		
10x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
32x SEM 10F		hexagon-nut, DIN 934		
32x FRSV 10X20F		round-head screw with short square, DIN 603		
32x US 10X21F		washer, DIN EN ISO 7089		
WLRK 200-50F	208 mm	537 mm	1967 mm	48,67 kg



Product	H	B	L	G
incl.: 13x FRSV 6X12E 13x SEMS 6E 32x SEM 10F 32x FRSV 10X20F 32x US 10X21F				
WLRK 200-60F	208 mm	637 mm	2067 mm	51,63 kg
incl.: 13x FRSV 6X12E 13x SEMS 6E 32x SEM 10F 32x FRSV 10X20F 32x US 10X21F				

H: height
B: width
L: length
G: weight

DETAILS / APPLICATIONS

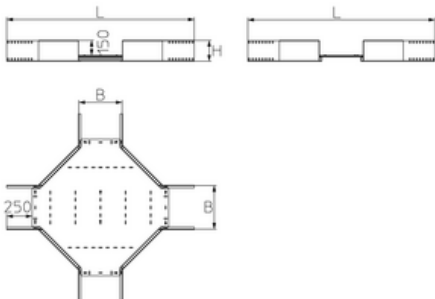

OPTIONAL ACCESSORIES

WLKD, WLKDR, WTRV 200

