


WPDUK

cover clamp

Cover clamp with screw head for mounting wide span covers on the underside for a flat appearance.

Can also be used as storm protection angle. According to assembly instructions you should use at least 6 safety elements for each 3 meters cable path cover. For wind-exposed areas, the number of cover clamps must be increased to at least 10 pcs.

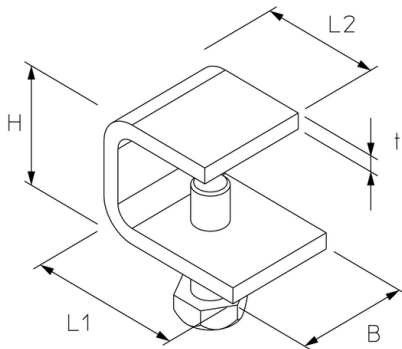

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L1	L2	t	M	G
WPDUK F	22 mm	20 mm	28 mm	21 mm	3,00 mm	2 Nm	0,038 kg
incl.:							
1x SES 6X20E		hexagon head bolt, DIN 933					

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L1	L2	t	M	G
WPDUK E	22 mm	20 mm	28 mm	21 mm	3,00 mm	2 Nm	0,037 kg
incl.:							
1x SES 6X20E		hexagon head bolt, DIN 933					

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L1	L2	t	M	G
WPDUK E4	22 mm	20 mm	28 mm	21 mm	3,00 mm	2 Nm	0,037 kg
incl.:							
1x SES 6X20E4		hexagon head bolt, DIN 933					

H: height

Page 1



B: width
L1: length 1
L2: length 2
t: material thickness
M: torque
G: weight

DETAILS / APPLICATIONS

