

WPL 150

wide-span cable ladder, height = 150 mm

Wide-span cable ladder, additional transverse rigidity due to welded rungs made of profile rungs. Electrical conductivity tested according to DIN EN 61537.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	A	Q _{LK}	G
WPL 150-20S	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,72 kN/m	36,06 kg
WPL 150-30S	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	1,08 kN/m	37,43 kg
WPL 150-40S	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	1,43 kN/m	38,8 kg
WPL 150-50S	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	1,79 kN/m	40,18 kg
WPL 150-60S	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	2,15 kN/m	41,55 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	Q _{LK}	G
WPL 150-20F	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,72 kN/m	38,58 kg
WPL 150-30F	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	1,08 kN/m	40,05 kg
WPL 150-40F	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	1,43 kN/m	41,52 kg
WPL 150-50F	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	1,79 kN/m	42,99 kg
WPL 150-60F	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	2,15 kN/m	44,46 kg

Stainless steel, according to ASTM 304 / BS 304 S 3


Product	H	B	L	t	A	Q _{LK}	G
WPL 150-20E	150 mm	200 mm	6000 mm	1,75 mm	256 cm ²	0,72 kN/m	37,25 kg



Product	H	B	L	t	A	Q_{LK}	G
WPL 150-30E	150 mm	300 mm	6000 mm	1,75 mm	384 cm ²	1,08 kN/m	38,63 kg
WPL 150-40E	150 mm	400 mm	6000 mm	1,75 mm	512 cm ²	1,43 kN/m	40,02 kg
WPL 150-50E	150 mm	500 mm	6000 mm	1,75 mm	640 cm ²	1,79 kN/m	41,4 kg
WPL 150-60E	150 mm	600 mm	6000 mm	1,75 mm	768 cm ²	2,15 kN/m	42,78 kg

H: height
B: width
L: length
t: material thickness
A: cross section area
 Q_{LK} : distributed load power cable
G: weight

DETAILS / APPLICATIONS

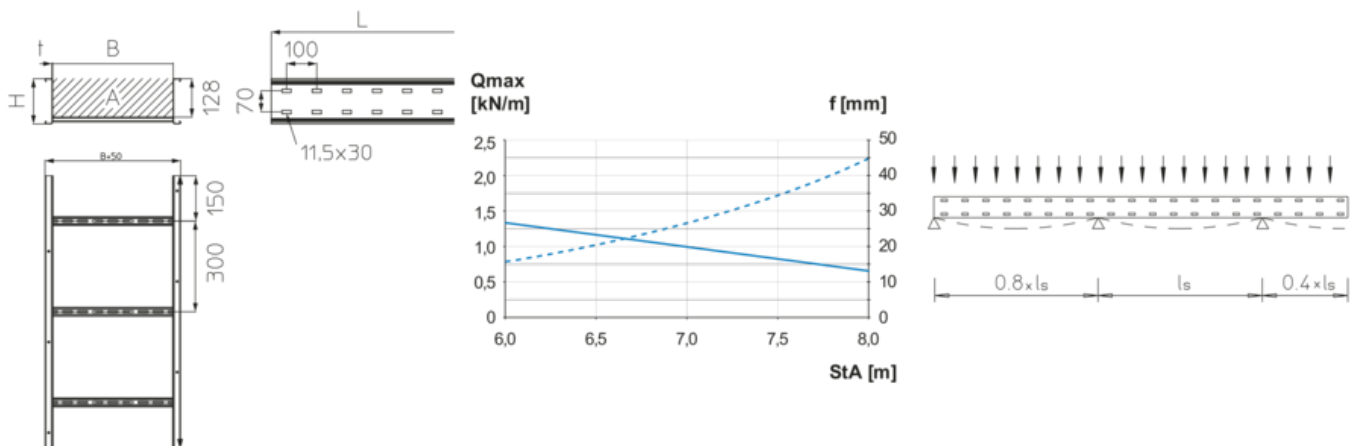

OPTIONAL ACCESSORIES

WPEA 150, WPLEAB 150, WPLB 150, WPLS 150, WPLF 150, WPLA 150, WPLAA 150, WPLK 150, WPV 150, WPVH 150, WPVV 150, WPTR 150, WPHS-A, WPHS-K, WPHS-P, WPHS-IS, WPLKAB, H, WPD, SWP



Do not walk upon!



UL classified

