


WPLA 120

wide-span branch, height = 120 mm

wide-span branch, formed component, integrated connectors included

Formed components must be supported at all sides.

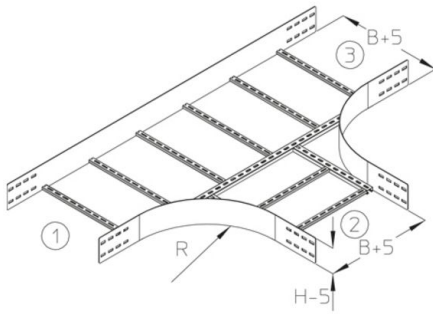

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPLA 120-20F	120 mm	200 mm	450 mm	15,91 kg
incl.:				
12x KLS 10X20F		clamp fastening set		
WPLA 120-30F	120 mm	300 mm	450 mm	16,99 kg
incl.:				
12x KLS 10X20F		clamp fastening set		
WPLA 120-40F	120 mm	400 mm	450 mm	17,95 kg
incl.:				
12x KLS 10X20F		clamp fastening set		
WPLA 120-50F	120 mm	500 mm	450 mm	18,91 kg
incl.:				
12x KLS 10X20F		clamp fastening set		
WPLA 120-60F	120 mm	600 mm	450 mm	20,29 kg
incl.:				
12x KLS 10X20F		clamp fastening set		

H: height
B: width
R: radius
G: weight



OPTIONAL ACCESSORIES

WPAD, WPTRV 120



UL classified

