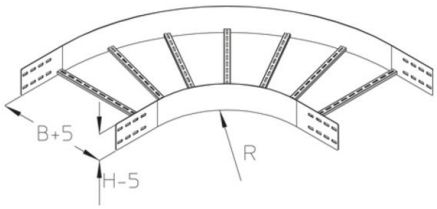

WPLB 120

wide-span bend, height = 120 mm

wide-span bend 90º for horizontal change of direction, with integrated connectors

Formed components must be supported at all sides.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPLB 120-20F	120 mm	200 mm	450 mm	8,85 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPLB 120-30F	120 mm	300 mm	450 mm	9,68 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPLB 120-40F	120 mm	400 mm	450 mm	10,8 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPLB 120-50F	120 mm	500 mm	450 mm	12,07 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPLB 120-60F	120 mm	600 mm	450 mm	13,04 kg
incl.: 8x KLS 10X20F		clamp fastening set		

H: height
B: width
R: radius
G: weight

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Date of issuance: 27.07.2024. Errors and technical modifications reserved.

OPTIONAL ACCESSORIES

WPBD, EBW, WPTRV 120

UL classified

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Date of issuance: 27.07.2024. Errors and technical modifications reserved.