


WPLB 150

wide-span bend, height = 150 mm

wide-span bend 90° for horizontal change of direction, with integrated connectors

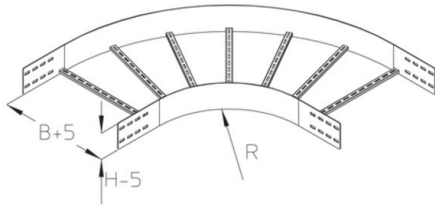

Formed components must be supported at all sides. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPLB 150-20F	150 mm	200 mm	450 mm	10,97 kg
incl.: 8x KLS 10X20F clamp fastening set				
WPLB 150-30F	150 mm	300 mm	450 mm	11,19 kg
incl.: 8x KLS 10X20F clamp fastening set				
WPLB 150-40F	150 mm	400 mm	450 mm	13,14 kg
incl.: 8x KLS 10X20F clamp fastening set				
WPLB 150-50F	150 mm	500 mm	450 mm	14,53 kg
incl.: 8x KLS 10X20F clamp fastening set				
WPLB 150-60F	150 mm	600 mm	450 mm	15,62 kg
incl.: 8x KLS 10X20F clamp fastening set				

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	R	G
WPLB 150-20E	150 mm	200 mm	450 mm	10,31 kg



Product	H	B	R	G
incl.: 8x KLS 10X20E				clamp fastening set
WPLB 150-30E	150 mm	300 mm	450 mm	11,2 kg
incl.: 8x KLS 10X20E				clamp fastening set
WPLB 150-40E	150 mm	400 mm	450 mm	12,36 kg
incl.: 8x KLS 10X20E				clamp fastening set
WPLB 150-50E	150 mm	500 mm	450 mm	13,67 kg
incl.: 8x KLS 10X20E				clamp fastening set
WPLB 150-60E	150 mm	600 mm	450 mm	14,67 kg
incl.: 8x KLS 10X20E				clamp fastening set

H: height
B: width
R: radius
G: weight

OPTIONAL ACCESSORIES

WPBD, EBW, WPTRV 150



UL classified

