


# WPLK 120

wide-span crossing, height = 120 mm

wide-span crossing for horizontal change of direction, with integrated connectors

Formed components must be supported at all sides.

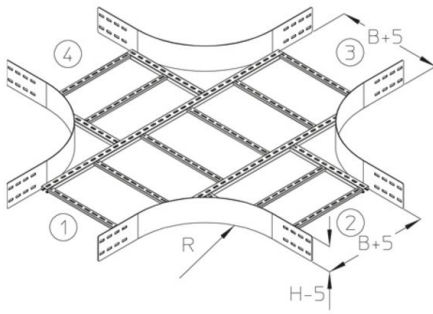

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPLK 120-20F	120 mm	200 mm	450 mm	21,7 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 120-30F	120 mm	300 mm	450 mm	22,76 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 120-40F	120 mm	400 mm	450 mm	23,73 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 120-50F	120 mm	500 mm	450 mm	24,7 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 120-60F	120 mm	600 mm	450 mm	26,05 kg
incl.: 16x KLS 10X20F clamp fastening set				

**H:** height  
**B:** width  
**R:** radius  
**G:** weight



## OPTIONAL ACCESSORIES

WPKD, WPTRV 120



UL classified

