


## WPLK 150

wide-span crossing, height = 150 mm

wide-span crossing for horizontal change of direction, with integrated connectors

Formed components must be supported at all sides. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

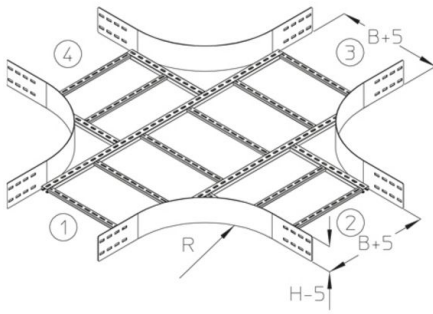

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPLK 150-20F	150 mm	200 mm	450 mm	25,42 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 150-30F	150 mm	300 mm	450 mm	26,48 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 150-40F	150 mm	400 mm	450 mm	27,45 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 150-50F	150 mm	500 mm	450 mm	28,42 kg
incl.: 16x KLS 10X20F clamp fastening set				
WPLK 150-60F	150 mm	600 mm	450 mm	29,78 kg
incl.: 16x KLS 10X20F clamp fastening set				

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	R	G
WPLK 150-20E	150 mm	200 mm	450 mm	24 kg



Product	H	B	R	G
incl.: 16x KLS 10X20E				clamp fastening set
WPLK 150-30E	150 mm	300 mm	450 mm	25 kg
incl.: 16x KLS 10X20E				clamp fastening set
WPLK 150-40E	150 mm	400 mm	450 mm	25,92 kg
incl.: 16x KLS 10X20E				clamp fastening set
WPLK 150-50E	150 mm	500 mm	450 mm	26,84 kg
incl.: 16x KLS 10X20E				clamp fastening set
WPLK 150-60E	150 mm	600 mm	450 mm	28,12 kg
incl.: 16x KLS 10X20E				clamp fastening set

**H:** height  
**B:** width  
**R:** radius  
**G:** weight

## OPTIONAL ACCESSORIES

WPKD, WPTRV 150



UL classified

