


## WPR 100

wide-span cable tray, height = 100 mm

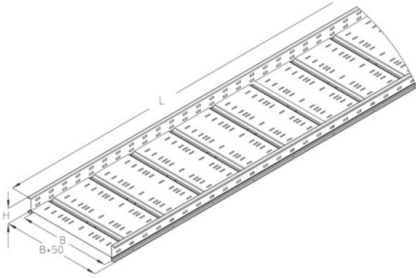

Wide-span cable tray, additional transverse rigidity due to welded and ripped inlay sheet. Electrical conductivity tested according to DIN EN 61537.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.




Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	t	A	Q <sub>SK</sub>	G
WPR 100-20E	100 mm	200 mm	6000 mm	1,50 mm	156 cm <sup>2</sup>	0,23 kN/m	36,26 kg
WPR 100-30E	100 mm	300 mm	6000 mm	1,50 mm	234 cm <sup>2</sup>	0,35 kN/m	43,14 kg
WPR 100-40E	100 mm	400 mm	6000 mm	1,50 mm	312 cm <sup>2</sup>	0,47 kN/m	50,26 kg
WPR 100-50E	100 mm	500 mm	6000 mm	1,50 mm	390 cm <sup>2</sup>	0,59 kN/m	57,38 kg
WPR 100-60E	100 mm	600 mm	6000 mm	1,50 mm	468 cm <sup>2</sup>	0,70 kN/m	64,48 kg

- H:** height
- B:** width
- L:** length
- t:** material thickness
- A:** cross section area
- Q<sub>SK</sub>:** distributed load control cable
- G:** weight

## DETAILS / APPLICATIONS



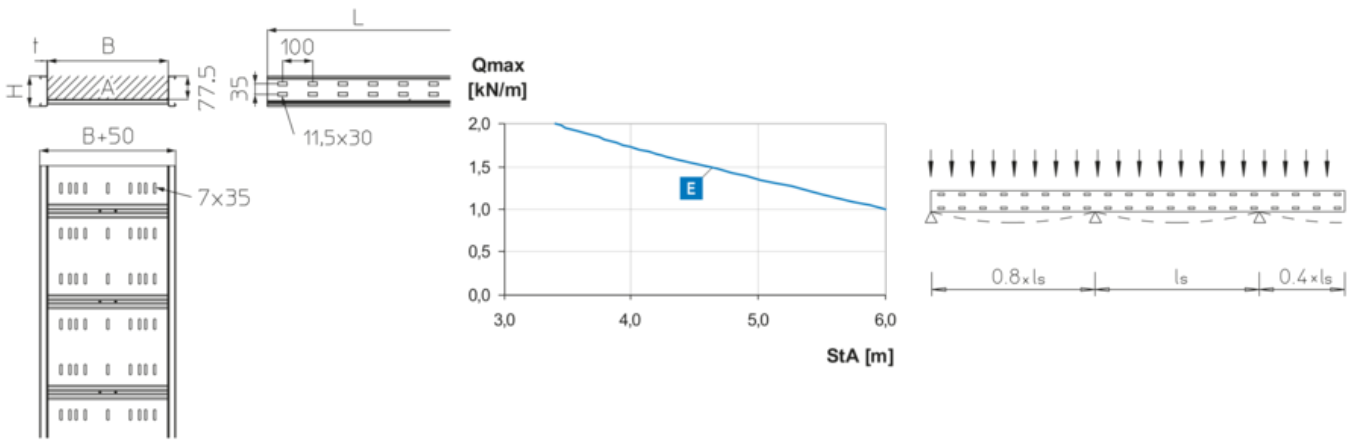

## OPTIONAL ACCESSORIES

WPEA 100, WPV 100, WPVH 100, WPVV 100, WPTR 100, WPHS-A, WPHS-K, WPHS-P, WPHS-IS, WPREB, WPRKAB, H, VB



Do not walk upon!

